ぼくのかんがえたさいきょうの問い合わせ管理システム

Awesome Inquiry Management System

柴田 博志

paperboy&co.

asakusa.rb

SHIBATA Hiroshi

paperboy&co., Inc.

発表場所 大江戸Ruby会議03

2013-03-16(Sat)

self

SHIBATA Hiroshi(@hsbt)

paperboy&co.


Rails
Girls
Kyoto



asakusa.rb

HsbtDiary

2013/02/25 (月) [長年日記]

joined ruby-core team.

I joined ruby-core team in Feb.23. I'll work follow topics:

- build checking and testing major application such as rails and fluentd in 2.1.0, 2.0.0 and 1.9.3.
- maintain to pure ruby library
- support Mac OS X
- maintain bugs.ruby-lang.org
- maintain www.ruby-lang.org
- maintain more developer tools of ruby commiter.

I'm looking forward to working with ruby-core team.

2013/02/23 に開催された開発者会議にて遠藤さんから推薦されRubyコミッタになりました。以下の分野で Ruby の開発に貢献したいと考えています。

- 2.1.0, 2.0.0, 1.9.3 のそれぞれの trunk のビルドと主要なアプリケーションでの動作確認
- pure ruby ライブラリのメンテナンス
- Mac のビルド環境のサポート
- bugs.ruby-lang.org のメンテナンス
- www.ruby-lang.org のメンテナンス
- その他 Ruby コミッタの開発ツール・サービスの整備

皆様、今後ともよろしくお願いいたします。



SHIBATA Hiroshi
shibata.hiroshi@gmail.com



A Programmer's Best Friend

ダウンロード　ドキュメント　ライブラリ　コミュニティ　コア開発　ニュース　セキュリティ　Rubyとは

ダウンロード

ここでは、Rubyインタプリタの代表的な入手方法を説明します。

Rubyのソースコード

Rubyの各バージョンのソースコードは、以下から入手できます。

- 最新の安定版であるruby 2.0.0-p0[tar.bz2|tar.gz|zip]が各ミラーサイトから入手できます。
- 前世代の安定版であるruby 1.9.3-p392[tar.bz2|tar.gz|zip]が各ミラーサイトから入手できます。
- 前々世代の安定版であるruby 1.8.7-p371[tar.bz2|tar.gz|zip]も各ミラーサイトから入手できます。
- 現時点での最新版スナップショット(2013/03/10 04:08:39)[tar.bz2|tar.gz|zip]が各ミラーサイトから入手できます。これはSubversionレポジトリのtrunkの先端(HEAD)から自動的にスナップショットを取ったものです。スナップショットの取得はある時刻に問答無用で行っているので、何らかの問題が残っている可能性があります。自己責任でどうぞ。
- 現時点での安定版スナップショット(2013/03/10 04:16:32)[tar.bz2|tar.gz|zip]が各ミラーサイトから入手できます。これはSubversionレポジトリのruby 2.0系のブランチ(ruby_2_0_0ブランチ)の先端から自動的にスナップショットを取ったものです。
- 最新のソースをAnonymous SVNで入手する方法については、レポジトリガイドを参照ください。

はじめよう!

ダウンロード

探求しよう!

ドキュメント

ライブラリ

コミュニティに参加しよう

メーリングリスト: 世界中のプログラマとRubyについて話しましょう。

日本Rubyの会: Rubyの利用者/開発者の支援を目的としたグループです。

更新順リンク: Ruby関連のサイトのリンクを更新順に並べたものです。

RubyForge トッププロジェクト

もっと読む...

Syndicate

最近のニュース (RSS)

1. www.ruby-lang.org
2. bugs.ruby-lang.org
3. Ruby Application CI
4. eban/shugo 業

本題



Q. 2012年新卒採用で入社した あゆちゃん、ペパボに入りたいと思った理由を教えてください。

(あゆ)

私は就職活動をしている中で、ここで働きたいと心から思える会社に入社しようと決めていたんです。その会社がペパボでした。

初めて参加したペパボの会社説明会では「起立・礼・着席」という号令でスタートしたんですが、その時直感的に「あ、この会社いいな」と思ったことを覚えています。

説明会後、スタッフのブログやサイトを毎日ひたすら見続け、ペパボで楽しく働かれている先輩方や会社の雰囲気にどんどん惹かれて行きました。また、調べていく内にそれまで自分が魅力的に感じたWEBサイトや書籍のいくつかがペパボと関連していることが分かり感動して、「ここで働いたら絶対面白い。この人達と一緒に働こう。」と決意しました。



やりたい
こと

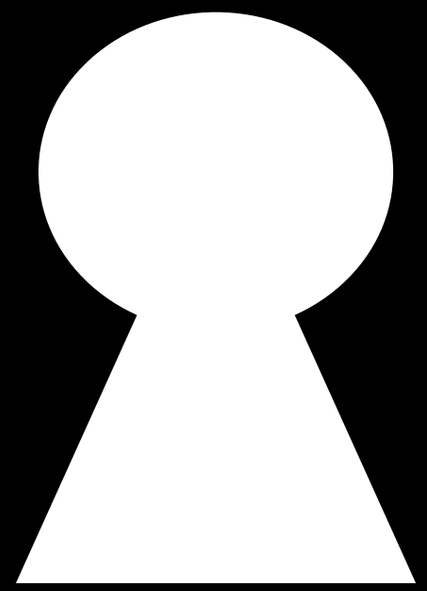

@cs

お問い合わせの検索が凄く遅くて5分経っても応答無かったり、10分経って見つからないとか...

mjd!?

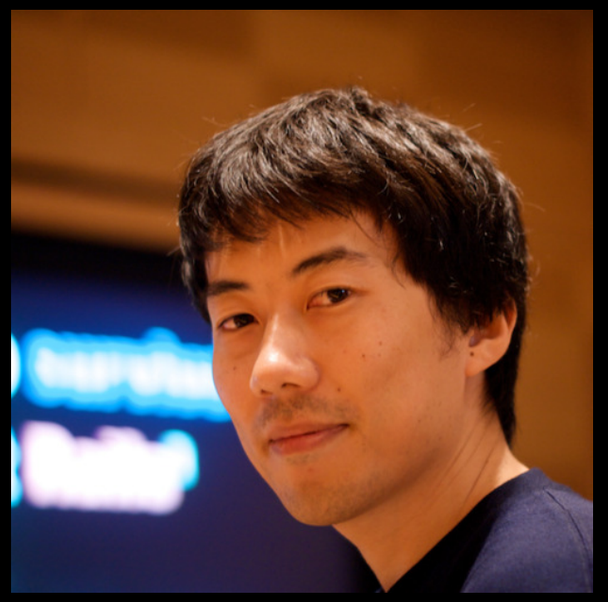

@hsbt

(そういや solr とか触らんとなあ、せっかくの機会だし作って見るか)
何とかしますよ!!1

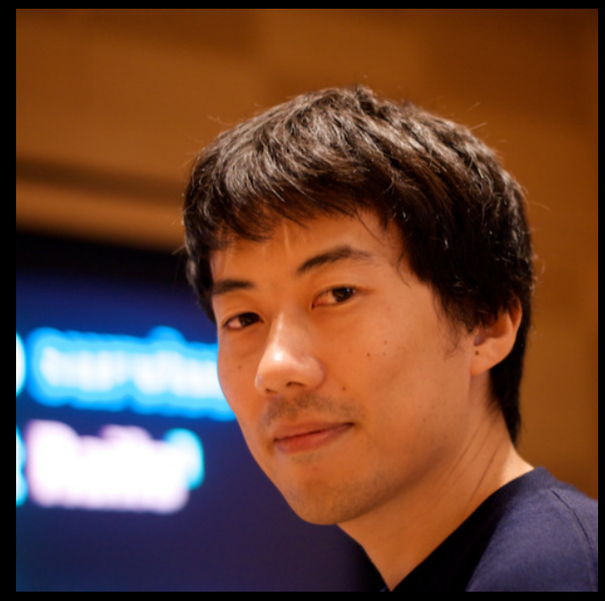

@hsbt

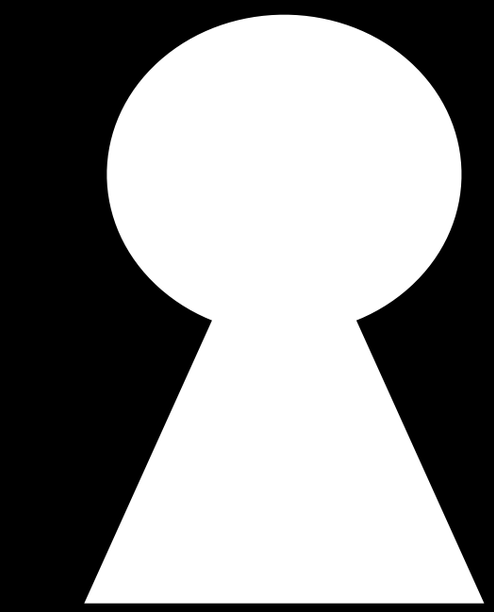

@cs

mjd!!1

5日後…

hsbt / whispered

Pull Request | Unwatch | Star 5 | Fork 0

Code | Network | Pull Requests 0 | Issues 0 | Wiki | Graphs | Settings

No description or homepage.

Clone in Mac | ZIP | HTTP | SSH | Git Read-Only | git@github.com:hsbt/whispered.git

Read+Write access

branch: **master** | Files | Commits | Branches 1 | Tags

whispered /

91 commits

refactor

hsbt authored 3 hours ago — latest commit b724f24ac0

app	7 hours ago	implements DynamicModel.all [hsbt]
config	3 hours ago	refactor [hsbt]
db	14 days ago	remove inq_type [hsbt]
doc	21 days ago	rails new: stable version [hsbt]
lib	21 days ago	rails new: stable version [hsbt]
log	21 days ago	rails new: stable version [hsbt]
public	15 days ago	first ride on twitter bootstrap [hsbt]
script	21 days ago	rails new: stable version [hsbt]
solr	2 days ago	applied dynamic displayed columns [hsbt]

1 2 3 4 5 … Next › Last »

008696

title	テストです
note	捨てていいです
hen_note	お問い合せNo.008696 お客様 この度はお問い合わせ頂き、誠にありがとうございます。 >捨てていいです どうぞよろしくお願いいたします。 お客様担当:
update_date	20030513111523
memo	

009985

title	テストです
note	sdふぁsdふぁ
hen_note	お問い合せNo.009985 お客様 この度はお問い合わせ頂き、誠にありがとうございます。 >sdふぁsdふぁ どうぞよろしくお願いいたします。 お客様担当:
update_date	20030528194506
memo	

010060

title	テストです
note	解決済みにしておいてください
hen_note	お問い合せNo.010060 お客様 この度はお問い合わせ頂き、誠にありがとうございます。 >解決済みにしておいてください どうぞよろしくお願いいたします。 お客様担当:
update_date	20030529192642
memo	

035458

1. Rails4

2. nulldb

3. slim

4. omniauth

5. sunspot

```
source 'https://rubygems.org'

gem 'rails', '~> 4.0.0.beta1'

gem 'activerecord-nulldb-adapter'
gem 'mysql2'
# gem 'pg'

gem 'slim-rails'
gem 'bootstrap-sass'
gem 'jquery-rails'
gem 'kaminari'

gem 'omniauth-github'
gem 'rails_config'

gem 'sunspot_rails'
gem 'progress_bar'
gem 'system_timer' if RUBY_VERSION < '1.9'

group :assets do
  gem 'sass-rails', '~> 4.0.0.beta1'
  gem 'coffee-rails', '~> 4.0.0.beta1'
  gem 'therubyracer'
  gem 'uglifier'
end

group :development, :test do
  gem 'sunspot_solr'
  gem 'spring'
  gem 'pry-rails'
  gem 'forgery'
  gem 'factory_girl_rails'
end

group :production do
  gem 'puma'
end
```



A lightweight templating engine

- Home
- About
- Docs
- Logic less
- Contribute
- API

slim-template / slim

gem version 1.3.6

dependencies up-to-date | code climate 3.5

```
doctype html
html
  head
    title Slim Examples
    meta name="keywords" content="template language"
    meta name="author" content=author
    javascript:
      alert('Slim supports embedded javascript!')

  body
    h1 Markup examples

    #content
      p This example shows you how a basic Slim file looks like.

      == yield

    - unless items.empty?
      table
        - for item in items do
          tr
            td.name = item.name
            td.price = item.price
    - else
      p
       | No items found.  Please add some inventory.
         Thank you!

  div id="footer"
    = render 'footer'
    | Copyright © #{year} #{author}
```

Source: slim-template/sli

PUBLIC intridea / omniauth

Home



OmniAuth

OmniAuth is a Ruby authentication framework aimed to abstract away the difficulties of working with various types of authentication providers. It is meant to be hooked up to just about any system, from social networks to enterprise systems to simple username and password authentication.

Getting Started

To use OmniAuth in a project with a Gemfile, just add each of the strategies you want to use individually:

```
gem 'omniauth-github', :git => 'git://github.com/intridea/omniauth-github.git'
gem 'omniauth-openid', :git => 'git://github.com/intridea/omniauth-openid.git'
```

Now you can use the `OmniAuth::Builder` Rack middleware to build up your list of OmniAuth strategies for use in your application:

User Docs

- List of Strategies
- Frequently Asked Questions
- Help Topics
- External Resources
- Upgrading to 1.0
- Auth Hash Schema

Strategy Developers

- Strategy Contribution Guide
- Adapting Strategies for 1.0

Project Resources

- Changelog
- Philosophy
- Mailing List
- API Docs
- Sites Using OmniAuth

Sunspot

Fork me on GitHub

Solr-powered search for Ruby objects

All the power of the Solr search engine; all the beauty of Ruby. Sunspot exposes all of Solr's most powerful search features using an API of elegant DSLs. That means robust, flexible fulltext search with no boolean queries and no string programming.

Index your objects.

```
class Post < ActiveRecord::Base
  searchable do
    text :title, :body
    text :comments do
      comments.map { |comment| comment.body }
    end
    integer :blog_id
    integer :author_id
    integer :category_ids, :multiple => true
    time :published_at
    string :sort_title do
      title.downcase.gsub(/^(an?|the)\b/, '')
    end
  end
end
```

Search for them.

```
Post.search do
  fulltext 'best pizza'
  with :blog_id, 1
  with(:published_at).less_than Time.now
  order_by :published_at, :desc
  paginate :page => 2, :per_page => 15
  facet :category_ids, :author_id
```

Scalable

Apache Solr

Apache Solr has been deployed successfully in both high query volume situations and large collection sizes

Apache Solr

Solr™ is the popular, blazing fast open source enterprise search platform from the Apache Lucene™ project. Its major features include powerful full-text search, hit highlighting, faceted search, near real-time indexing, dynamic clustering, database integration, rich document (e.g., Word, PDF) handling, and geospatial search. Solr is highly reliable, scalable and fault tolerant, providing distributed indexing, replication and load-balanced querying, automated failover and recovery, centralized configuration and more. Solr powers the search and navigation features of many of the world's largest internet sites.

Solr is written in Java and runs as a standalone full-text search server within a servlet container such as Tomcat. Solr uses the Lucene Java search library at its core for full-text indexing and search, and has REST-like HTTP/XML and JSON APIs that make it easy to use from virtually any programming language. Solr's powerful external configuration allows it to be tailored to almost any type of application without Java coding, and it has an extensive plugin architecture when more advanced customization is required.

DOWNLOAD

Apache Solr 4.1

DOWNLOAD

Apache Solr 3.6.2

Resources

Features
Tutorial
Release Documentation
Version Control
Books
Screenshots

基本方針

1. スキーマレス

2. Engine活用

t_foo_bar

create_date
update_date
(ただし文字列)

```ruby
Settings.inquiries_tables.each do |table|
  class_name = table.name.singularize.classify
  self.class.const_set class_name, Class.new(ActiveRecord::Base)

  class_name.constantize.class_eval do |klass|
    klass.establish_connection table.database.to_hash
    klass.table_name = table.name

    def klass.text_columns
      columns.select{|c| [:string, :text].include?(c.type) && c.name !=
settings.created_at }.map{|c| c.name.to_sym}
    end

    def klass.display_columns
      settings.display_columns.map(&:to_sym)
    end

    def klass.settings
      Settings.inquiries_tables.detect{|table| table.name == self.table_name}
    end

    def created_at
      Time.parse(send(self.class.settings.created_at.to_sym))
    rescue
      nil
    end if table.created_at && !respond_to?(:created_at)

    attr_accessible *text_columns if Rails.env.development?
    searchable do
      text *text_columns
      time :created_at if settings.created_at
    end
  end
end if Settings.inquiries_tables.present?
```

MySQLのスキーマ定義を見て、その中からテキストっぽいカラムだけを取り出して、そのカラム名のシンボルを配列で返すのってどうやるんだっけ？？？

```ruby
def klass.text_columns
  columns.select do |c|
    [:string, :text].include? c.type
  end.map{|c| c.name.to_sym}
end
```

```ruby
module DynamicModel
  def all
    Settings.inquiries_tables.map do |table|
      table.name.singularize.classify.constantize
    end
  end
  module_function :all
end
```



paperboy&co.

paperboy-all

Tokyo, Japan

http://www.paperboy.co.jp/

Joined on May 05, 2012

8 public repos **23** private repos **226** members

Repositories | **Members**

Edit paperboy-all's Profile



2get
Mayoto Yoshida

Conceal membership



3loversnet7
Minako Kaise

Conceal membership



adarapata
いも

Conceal membership



akrmiya
Akira Miyashita

Conceal membership



alphaaaa
Ai Tashiro

Conceal membership



ashlaman
Kent Nishioka

Conceal membership



ask1105
ask11

Conceal membership



atakaP
hiroshi ataka

Conceal membership



atani
atani

Conceal membership



Atrac613

Conceal membership

```ruby
class InquiriesController < ApplicationController
  before_filter :login_required

  respond_to :html

  def index
    @inquiries = []
    DynamicModel.all.each do |klass|
      @inquiries << klass.all(:limit => 5)
    end
    @inquiries.flatten!
  end

  def search
    @inquiries = []
    DynamicModel.all.each do |klass|
      @inquiries << klass.search do
        fulltext params[:q]
      end.results
    end
    @inquiries.flatten!
    @inquiries =
Kaminari.paginate_array(@inquiries).page(params[:page]).per(25)
  end

  def show
    @inquiry = params[:class_name].constantize.find(params[:id])
  end
end
```

```
- @inquiries.each do |inquiry|
  .row-fluid
    .span12
      .fieldset
        .legend = link_to inquiry.send(inquiry.class.primary_key.to_sym),
                          inquiry_path(inquiry, :class_name => inquiry.class)
        table.table
          - inquiry.class.text_columns.each do |c|
          - next unless inquiry.class.display_columns.include? c
          tr
            td= c.to_s
            td= truncate(inquiry.send(c.to_sym), length: 140)
        - if inquiry.class.settings.created_at
          tr
            td= inquiry.class.settings.created_at.to_s
            td= inquiry.send(inquiry.class.settings.created_at.to_sym)
```

ポジトリ

ku 405
了時刻: -

52
sec, 終了時刻: -

FTR 464
0 sec, 終了時刻: -

Gtal 302
5 sec, 終了時刻: -

rotobuf 50
終了時刻: -

o/jttslite 30
1 sec, 終了時刻: -

hia 31
7 sec, 終了時刻: -

-boew 2363
1 sec, 終了時刻: -

nMagick 371
4 sec, 終了時刻: -

hsbt/whispered

5 0

最新 ビルド履歴 プルリクエスト ブランチまとめ

ビルド	メッセージ	コミット	Commiter	処理時間	終了時刻
17	refactor	b724f24 (master)	SHIBATA Hiroshi	4 min 37 sec	about 3 hours ago
16	implements DynamicModel.all	6e68f19 (master)	SHIBATA Hiroshi	4 min 52 sec	about 7 hours ago
15	anchored detail view	320fb1a (master)	SHIBATA Hiroshi	6 min 16 sec	about 23 hours ago
14	added welcome controller	eef2374 (master)	SHIBATA Hiroshi	4 min 54 sec	about 24 hours ago
13	added more tests	d454545 (master)	SHIBATA Hiroshi	4 min 55 sec	about 24 hours ago
12	fix broken test	240e2d5 (master)	SHIBATA Hiroshi	4 min 59 sec	about 24 hours ago
11	typo...	e1436f8 (master)	SHIBATA Hiroshi	4 min 22 sec	a day ago
10	remove travis-solr, and use own configuration of solr	24034e7 (master)	SHIBATA Hiroshi	4 min 21 sec	a day ago
9	added configuration of solr	c773111 (master)	SHIBATA Hiroshi	9 min 17 sec	a day ago
8	rename	7c2a642 (master)	SHIBATA Hiroshi	4 min 56 sec	a day ago
7	ignored db:seed when travis	976fb81 (master)	SHIBATA Hiroshi	5 min 24 sec	a day ago
6	ignored dynamic definition when running travis	ef56e6c (master)	SHIBATA Hiroshi	8 min 32 sec	a day ago
5	paginate per 500	96e35ff (master)	SHIBATA Hiroshi	4 min 59 sec	a day ago
4	copied database configuration	19ebbd9 (master)	SHIBATA Hiroshi	18 min 16 sec	2 days ago
3	ignored system_timer in 1.8 :<	a33b421 (master)	SHIBATA Hiroshi	4 min 49 sec	2 days ago
2	added db task to travis	01b7b6f (master)	SHIBATA Hiroshi	3 min 10 sec	2 days ago
1	added .travis.yml	cf647bd (master)	SHIBATA Hiroshi	2 min 18 sec	2 days ago

Show more

スポンサ
SOUND
スポンサ

ワーカー
bluebox-
bluebox-
bluebox-
bluebox-
ruby1.wo
ruby2.wo
ruby3.wo
ruby4.wo
ruby5.wo

Running

2600hz/
alphaHea
davideca
dcoeurjo
DGtal-tea
kaize/nas
ktns/rupl
rapidftr/F
rdsubhas
scikit-lea
wet-boew
ZenMagi

キュー: C
CocoaPo

PUBLIC hsbt / whispered-puppet

Pull Request | Unwatch | Unstar 2 | Fork 0

Code | Network | Pull Requests 0 | Issues 0 | Wiki | Graphs | Settings

No description or homepage.

Clone in Mac | ZIP | HTTP | SSH | Git Read-Only | git@github.com:hsbt/whispered-puppet.git

Read+Write access

branch: **master** | Files | Commits | Branches 1 | Tags

whispered-puppet /

13 commits

added upstream configuration for nginx

hsbt authored 19 minutes ago — latest commit eeae502365

manifests	a day ago	added rbenv inialize [hsbt]
modules	19 minutes ago	added upstream configuration for nginx [hsbt]
.gitignore	2 days ago	init [hsbt]
README.md	a day ago	readme [hsbt]
Vagrantfile	2 days ago	init [hsbt]

README.md

whispered-puppet

- https://github.com/stahnma/puppet-module-epel

1. rbenv
2. solr
3. supervisord
4. nginx

1 2 3 4 5 … Next › Last »

008696

title	テストです
note	捨てていいです
hen_note	お問い合せNo.008696 お客様 この度はお問い合わせ頂き、誠にありがとうございます。 >捨てていいです どうぞよろしくお願いいたします。 お客様担当:
update_date	20030513111523
memo	

009985

title	テストです
note	sdふぁsdふぁ
hen_note	お問い合せNo.009985 お客様 この度はお問い合わせ頂き、誠にありがとうございます。 >sdふぁsdふぁ どうぞよろしくお願いいたします。 お客様担当:
update_date	20030528194506
memo	

010060

title	テストです
note	解決済みにしておいてください
hen_note	お問い合せNo.010060 お客様 この度はお問い合わせ頂き、誠にありがとうございます。 >解決済みにしておいてください どうぞよろしくお願いいたします。 お客様担当:
update_date	20030529192642
memo	

035458

だいたいできた

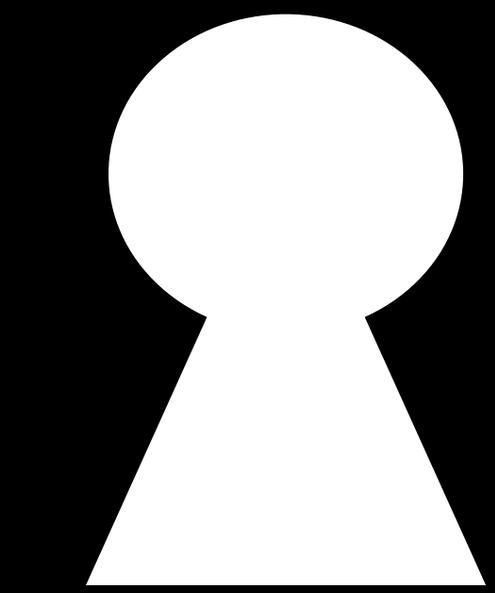

@cs

めっさ早(゜ロ゜)

YATTA!

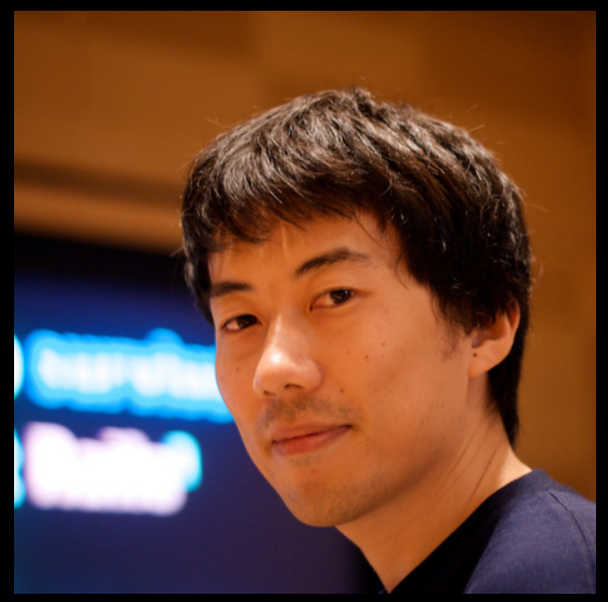

@hsbt

https://github.com/hsbt/whispered

https://github.com/hsbt/whispered-puppet