
Crafting Rails Culture to Your Company

Hiroshi SHIBATA
@hsbt

RailsPacific





Thank you!

SHIBATA Hiroshi

@hsbt



Matze

Tokyo


札幌
北京
北朝鮮
日本海
日本
名古屋
東京
大阪
광주
부산
福岡
中国
上海
成都
重庆
杭州
東シナ海
ブータン
バングラデシュ
台湾
广州
香港
ハノイ
Hà Nội
ミャンマー
ヤンゴン
ရန်ကုန်
ラオス
タイ
ベトナム
バンコク
กรุงเทพมหานคร
カンボジア
ホーチミン
Hồ Chí Minh
ベンガル湾
Andaman Sea
タイランド湾
南シナ海
ルソン島
Kalusunan
マニラ
Maynila
フィリピン
ミンダナオ島
Mindanao
マレーシア
クアラルンプール
Kuala Lumpur
シンガポール
セレベス海
ジャカルタ
Jakarta
スラバヤ
Surabaya
インドネシア
バンダ海
ビスマルク海
パプア
ニューギニア




RailsGirls in Japan



asakusa.rb

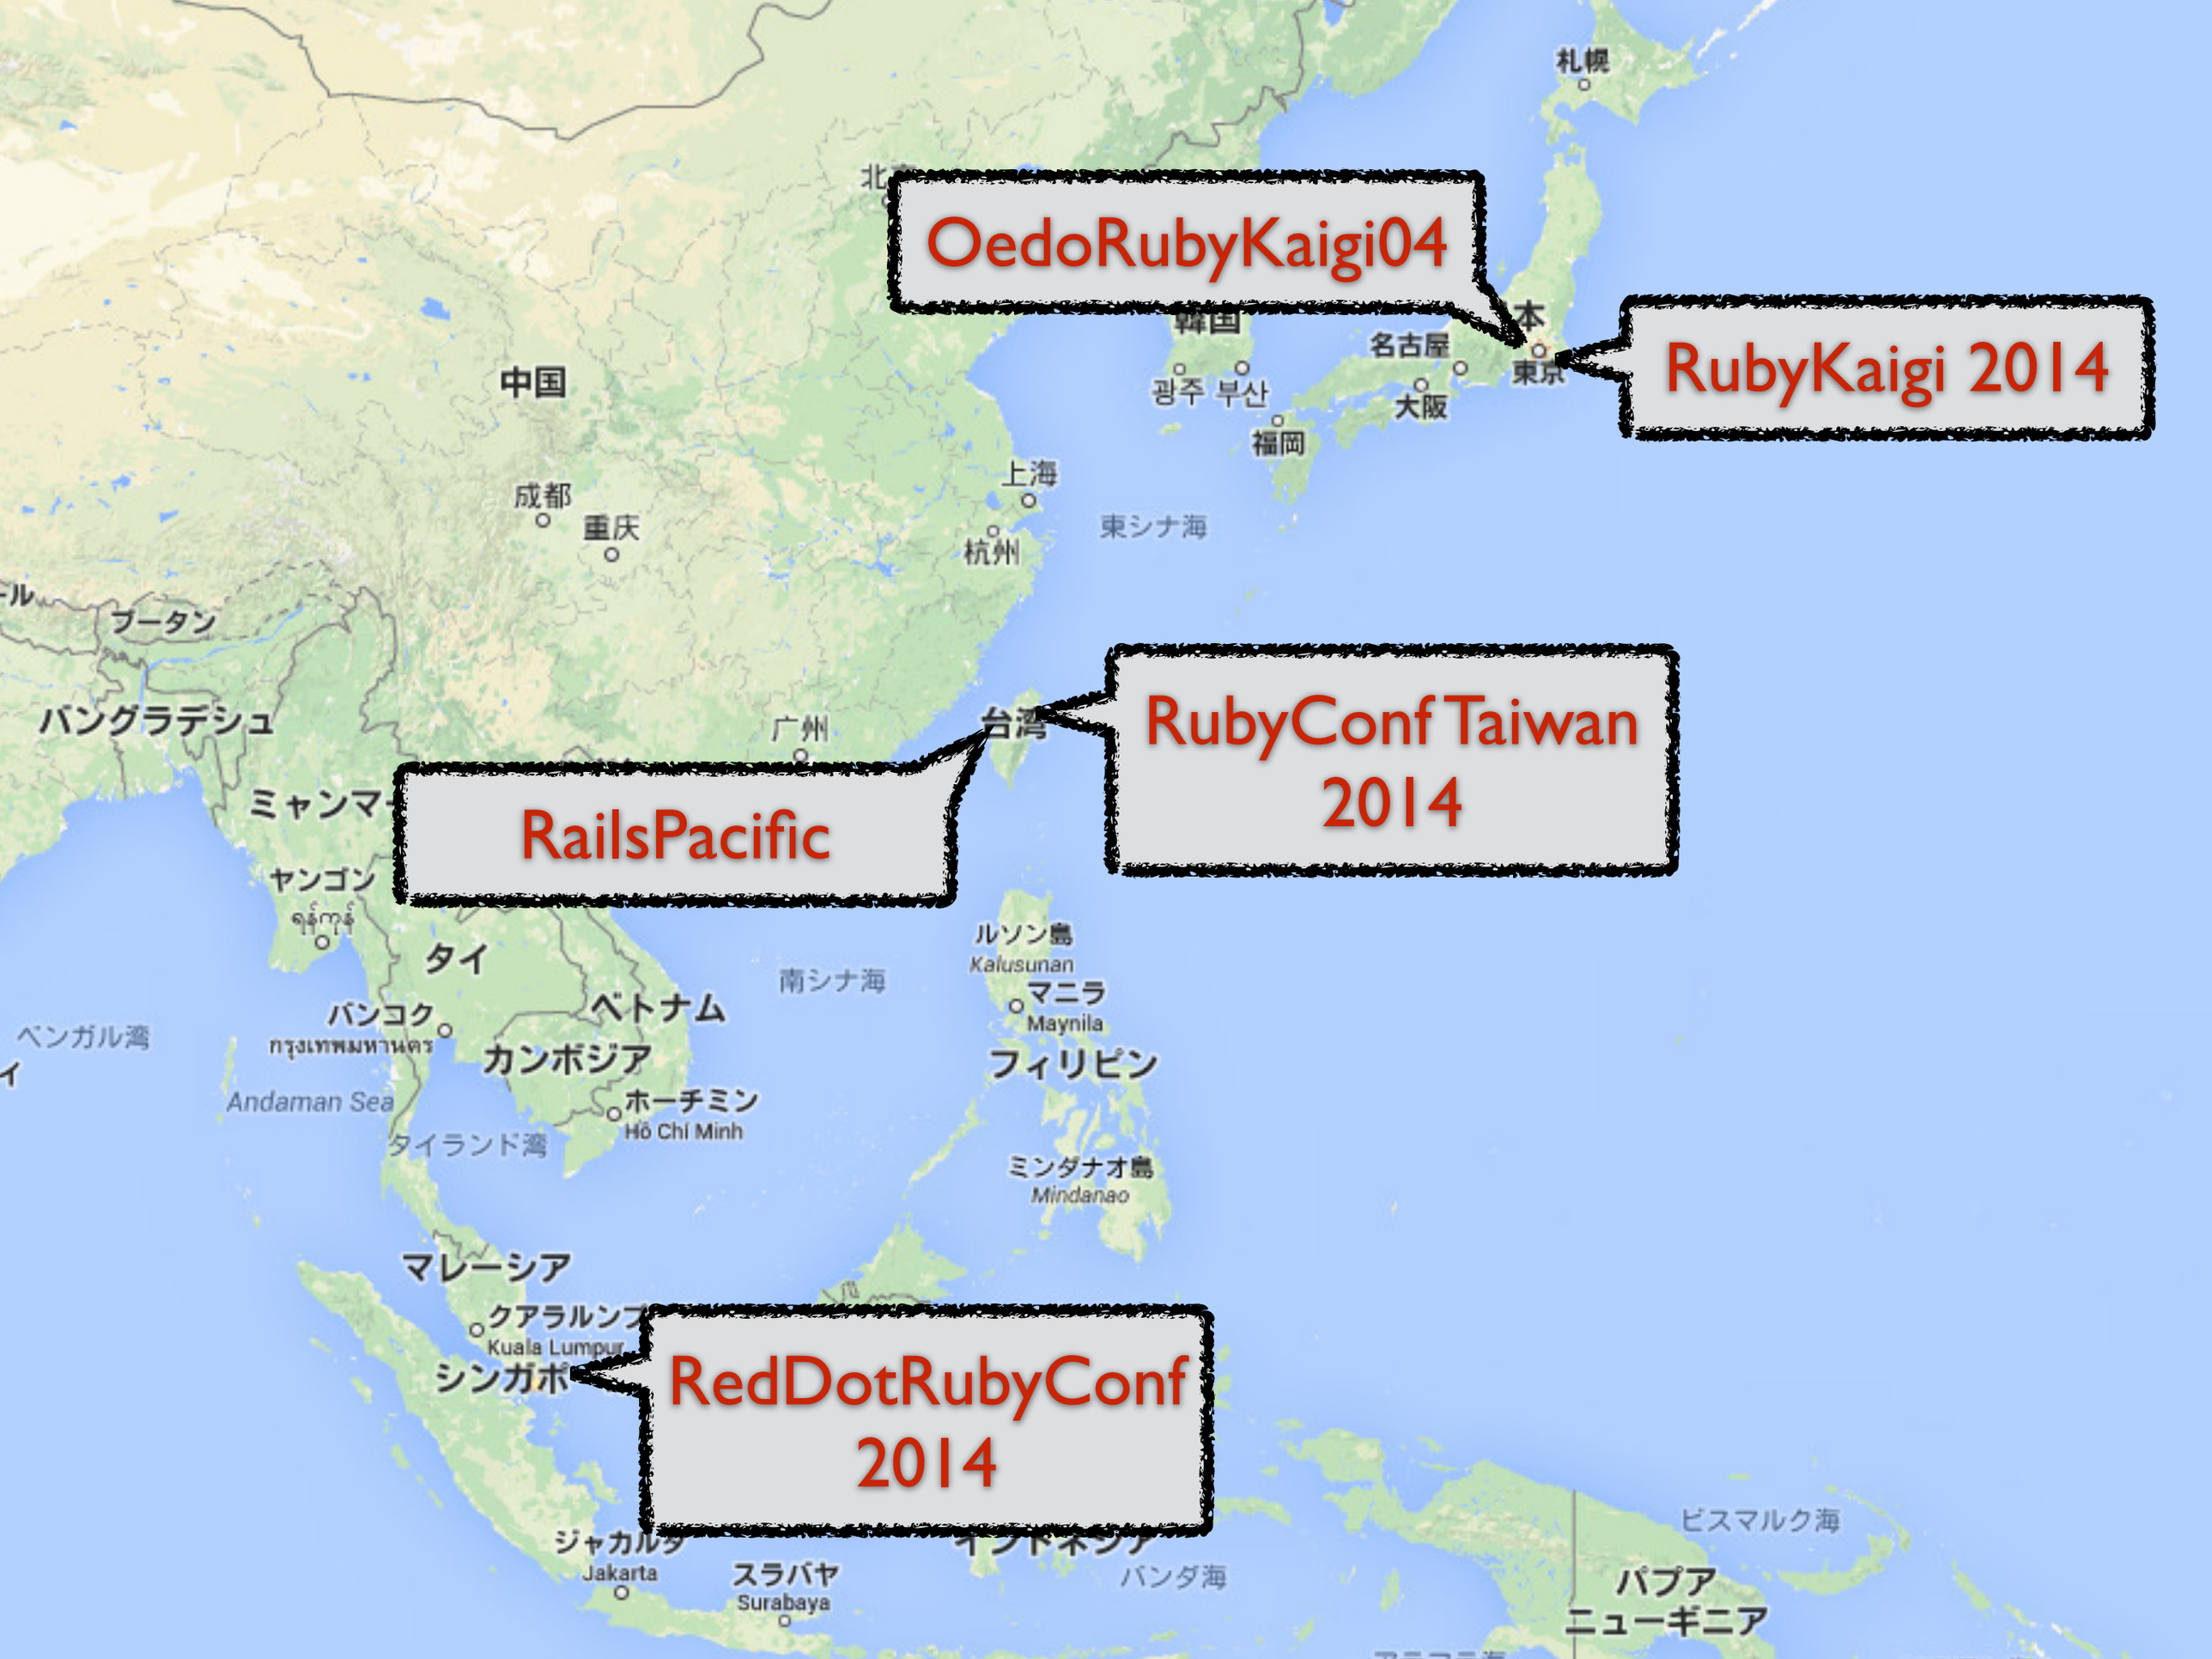
OedoRubyKaigi04
RubyKaigi 2014
RubyConf Taiwan 2014
RailsPacific
RedDotRubyConf 2014
札幌
韓国
名古屋
광주
부산
大阪
福岡
東京
中国
上海
成都
重庆
杭州
東シナ海
ブータン
バングラデシュ
广州
台湾
ミャンマー
ヤンゴン
ルソン島
Kalusunan
南シナ海
マニラ
Maynila
タイ
バンコク
กรุงเทพมหานคร
ベトナム
カンボジア
フィリピン
ベンガル湾
Andaman Sea
ホーチミン
Hồ Chí Minh
タイランド湾
ミンダナオ島
Mindanao
マレーシア
クアラルンプ
Kuala Lumpur
シンガポ
ビスマルク海
ジャカルタ
Jakarta
スラバヤ
Surabaya
バンダ海
パプア
ニューギニア

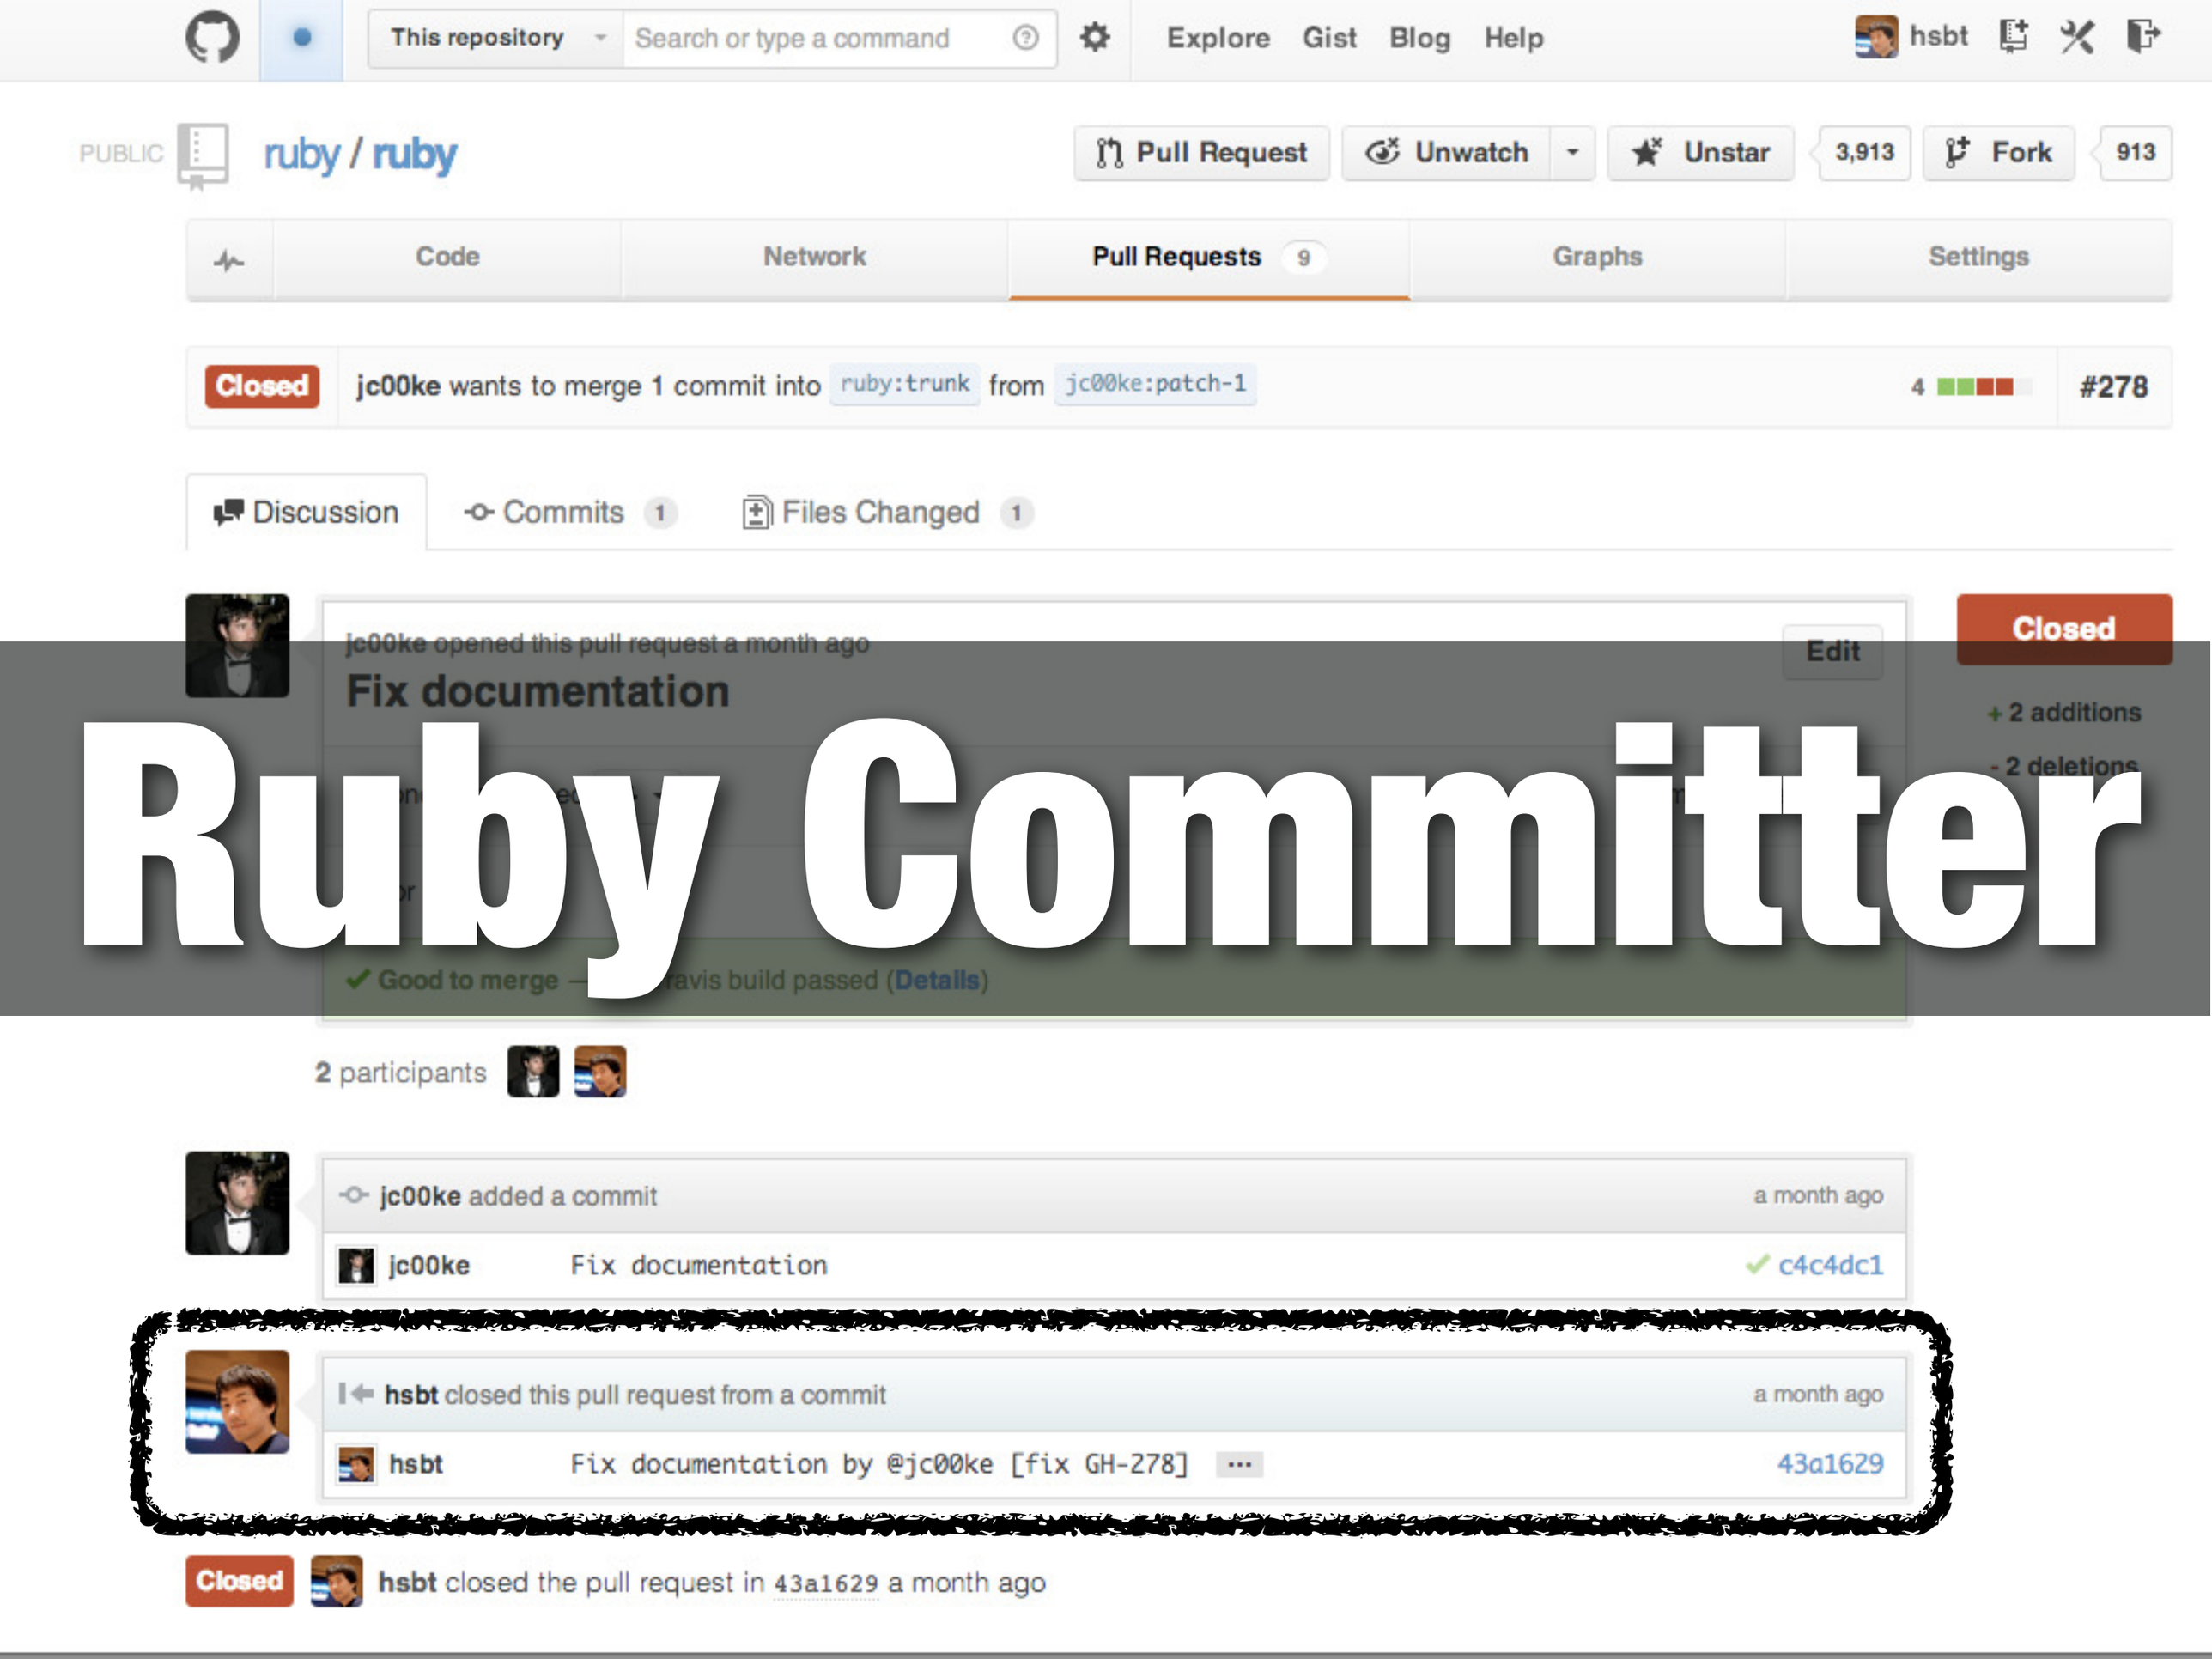

Ruby Committer

commit bit collector

ruby
rubygems
rake
rdoc
psych
syck
ruby-build

railsgirls
railsgirls-jp
kaminari
tdiary
hiki
jenkins.rb
fastladder

My work of Ruby 2.2.0

Update test-unit and minitest (removed from repository but bundled in tarball)
coordinate to Ruby committers
negotiate to sponsors
make development environment

Ruby
A PROGRAMMER'S BEST FRIEND

Google™ Custom Search | Search

Downloads | Documentation | Libraries | Community | News | Security | About Ruby

Ruby is...

A dynamic, open source programming language with a focus on simplicity and productivity. It has an elegant syntax that is natural to read and easy to write.

Download Ruby or Read More...

```
# The famous Hello World
# Program is trivial in
# Ruby. Superfluous:
#
# * A "main" method
# * Newline
# * Semicolons
#
# Here is the Code:

puts "Hello World!"
```

OpenSSL Severe Vulnerability in TLS Heartbeat Extension (CVE-2014-0160)

There is a severe vulnerability in OpenSSL's implementation of the TLS/DTLS (transport layer security protocols) heartbeat extension (RFC6520). This a serious vulnerability which has been assigned the CVE identifier CVE-2014-0160.

Continue Reading...

Posted by hone and zzak on 10 Apr 2014

Heap Overflow in YAML URI Escape Parsing (CVE-2014-2525)

There is an overflow in URI escape parsing of YAML in Ruby. This vulnerability has been assigned the CVE identifier CVE-2014-2525.

Continue Reading...

Posted by hone and zzak on 29 Mar 2014

Get Started, it's easy!

- Try Ruby! (in your browser)
- Ruby in Twenty Minutes
- Ruby from Other Languages

Explore a new world...

- Documentation
- Books
- Libraries
- Success Stories

Ruby Issue Tracking System

Home

Ruby is a dynamic, open source programming language with a focus on simplicity and productivity. It has an elegant syntax that is natural to read and easy to write. This system is hosting the development of Ruby language and its related projects.

You must register your account and activate it via an email before reporting issues.
Or login if you have an account.

How to report a bug

See HowToReport (English) or HowtoReportJa (Japanese).

- ruby-trunk - Developing version of Ruby

About Security Reports

Please *DO NOT* report security issues via this system, because the system publishes them immediately.
In order to report, send a mail to security@ruby-lang.org instead. Reported problems will be published after fixes.

Ruby Language Home

http://www.ruby-lang.org

Latest projects

- Backport21 (12/21/2013)
  Backport request for Ruby
  Don't report issues here.
  Report it to ruby-trunk, e
- Backport200 (02/14/201
  Backport request for Ruby
  Don't report issues here.
  Report it to ruby-trunk, e
- CommonRuby (12/21/20
  A common set of Ruby(?)
- Backport93 (08/24/2011
  Backport request for Ruby
  Don't report issues here.
  Report it to ruby-trunk, e
- Backport92 (08/02/2010
  Don't report issues here.

Powered by Redmine © 2006-2014 Jean-Philippe Lang

るりまサーチ

すべて 72414件 | 1.8.7 17617件 | 1.9.3 18361件 | 2.0.0 18397件 | 2.1.0 18039件

最速Rubyリファレンスマニュアル検索!

検索

組み込みクラス一覧

A〜E

ARGF.class (154)
BasicObject (42)
Binding (7)
Complex (126)
Dir (139)
Encoding::Converter (69)
Encoding::UndefinedConversionError (15)
Enumerator::Lazy (46)
Exception (41)
Array (538)
Bignum (124)
Class (28)
Continuation (2)
Encoding (660)
Encoding::InvalidByteSequenceError (21)
Enumerable::Enumerator (5)
Enumerator (41)
Errno::EXXX (12)

F〜J

FalseClass (18)
File (296)
Fixnum (135)
Hash (308)
Integer (100)
Fiber (9)
File::Stat (166)
Float (196)
IO (521)

K〜O

LoadError (2)
LocalJumpError (8)

Index of /pub/ruby/

../		
1.0/	06-Jul-2009 08:33	-
1.1a/	04-Aug-2003 17:26	-
1.1b/	16-Jul-1998 09:30	-
1.1c/	18-Jan-1999 08:28	-
1.1d/	25-Dec-1998 04:39	-
1.2/	18-Sep-1999 04:55	-
1.3/	18-Sep-1999 04:53	-
1.4/	05-Apr-2001 07:36	-
1.6/	20-Sep-2005 16:41	-
1.8/	27-Jun-2013 12:00	-
1.9/	24-Feb-2014 05:13	-
2.0/	24-Feb-2014 12:53	-
2.1/	24-Feb-2014 06:11	-
binaries/	15-Jun-2004 15:21	-
doc/	29-Aug-2012 10:24	-
stable/	24-Feb-2014 06:11	-
ruby-1.8.5-p115.tar.bz2	03-Mar-2008 14:44	3862732
ruby-1.8.5-p115.tar.gz	03-Mar-2008 14:45	4486245
ruby-1.8.5-p115.zip	03-Mar-2008 14:45	5494089
ruby-1.8.6-p114.tar.bz2	03-Mar-2008 14:45	3920921
ruby-1.8.6-p114.tar.gz	03-Mar-2008 14:46	4549333
ruby-1.8.6-p114.zip	03-Mar-2008 14:46	5565408
ruby-1.8.6-p383.tar.bz2	03-Aug-2009 17:53	3981736
ruby-1.8.6-p383.tar.gz	03-Aug-2009 17:54	4578649
ruby-1.8.6-p383.zip	03-Aug-2009 17:55	5622203
ruby-1.8.6-p388.tar.bz2	10-Jan-2010 15:54	3973412
ruby-1.8.6-p388.tar.gz	10-Jan-2010 15:55	4583294
ruby-1.8.6-p388.zip	10-Jan-2010 15:57	5625625
ruby-1.8.6-p398.tar.bz2	03-Feb-2010 17:24	3972884

heroku

Features Pricing Add-ons Blog Documentation Support Contact Dashboard Log out

Build, run, and scale apps.

Cloud computing designed and built for developers.

Sign up for free

No credit card required


GlobalSign
GMO INTERNET GROUP

EN / United States

Sales: 1-877-775-4562 | Contact | Account Logi

Products SSL Enterprise Partners Support

Search...

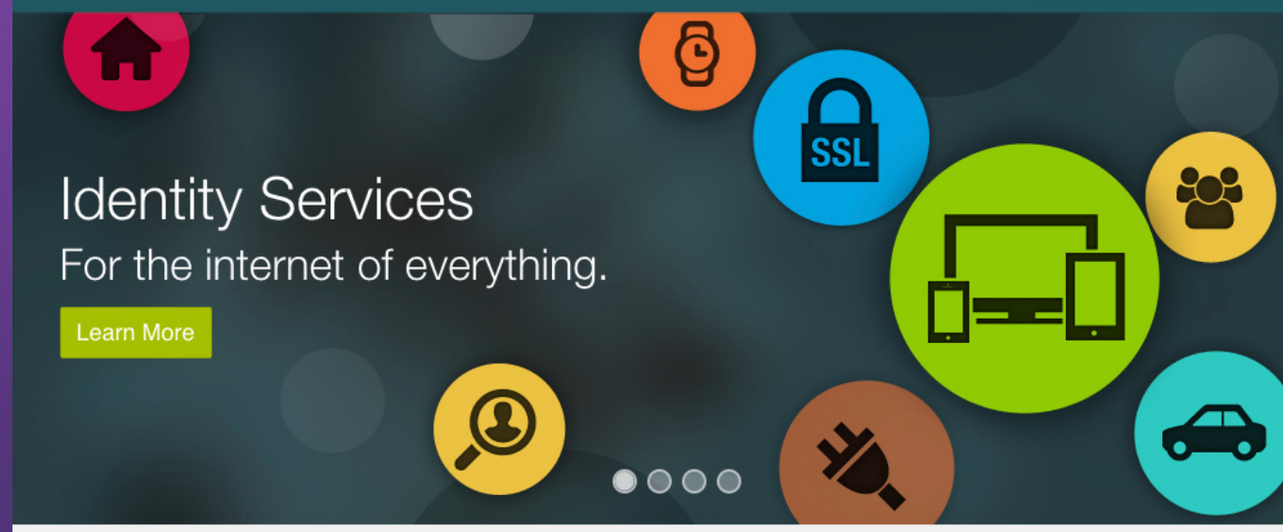



Enterprise Identity Made Simple

Cloud-based authentication and security services.



Resell SSL and Identity Services

Provide high-value security services to your customers



Check your Server for Vulnerabilities

Free SSL Checker checks the status of your certificates

Buy SSL Now

Buy SSL | Renew SSL

Additional Certificates:


- Code Signing Certificates
- PDF Signing
- S/MIME Certificates

Use GlobalSign 2048 bit SSL for

IIJ
Internet Initiative Japan

CONNECTED via IPv4 › お問い合わせ › サイトマップ English

› サービス・ソリューション › 企業情報 › 株主・投資家向け情報

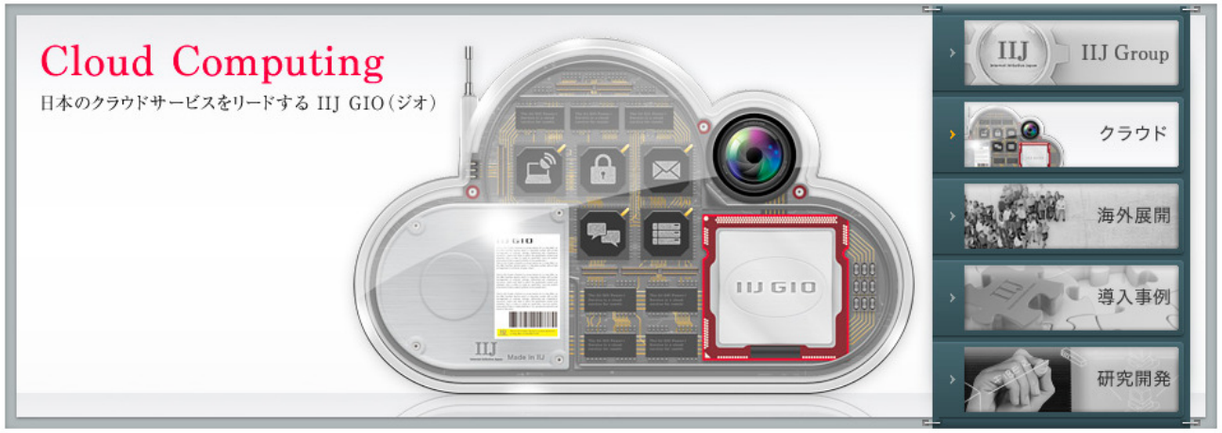

プレスリリース › 一覧 RSS

2014/09/17 IIJ プレスリリース › IIJ、Webアプリケーションに対する攻撃を防御する「IIJ WAFソリューション」を提供開始


2014/09/09 IIJ 参考資料 › 株式会社日刊現代との和解成立について

2014/09/01 IIJグループ 参考資料 › 不正接続対策アプライアンスのハードウェアリニューアルと有償版管理サーバソフトの新規リリースについて

2014/09/01 IIJグループ 参考資料 › hi-ho、新規入会で「楽天でんわ」通話料1,000円分の無料クーポンを提供

2014/08/25 IIJ プレスリリース › IPSとIIJ、中堅・中小企業向けSAPクラウドソリューションの提供で協業

› 本社移転関連情報





イベント・セミナー › 一覧 RSS

› SDN Japan 2014
グループ会社のストラトスフィアが協賛い

fastly

Solutions Products Pricing Customers About



ORIGIN RPS: 59K | TIME TO 1ST BYTE: 0.107 ms | HIT RATE: 88.0% | BANDWIDTH: 139 Gb/s

Microseconds count. Get fast. Get Fastly.

We're the smartest CDN on the planet. That means microsecond response. Unheard of extensibility. Flexibility. Talk to our engineers. Test us. Try us. Free. LEARN MORE »

TRY FASTLY NOW!

TRUSTED BY FAST COMPANY wayfair theguardian GitHub shopify imgur

Solutions

Products

Ruby CI

Current Rep

Server	Datetime	Branch	Option	Revision	test	test-all	rubyspec	Summary
Debian 7.5 i686	09-23 19:05	trunk		47692				330W success
Debian 7.5 x86_64	09-23 17:00	trunk		47692				321W success
Debian 7.5 armhf	09-21 04:00	trunk		47655	2BF	28F52E		352W 2BFail 28F52E
Ubuntu 10.04 32-bit	09-23 17:33	trunk		47692		0F1E		348W 0F1E
Ubuntu 10.04 64-bit	09-23 19:03	trunk		47692		0F1E		349W 0F1E
Ubuntu 14.04 x86_64	09-23 17:00	trunk		47692				317W success
Gentoo	09-23 19:10	trunk		47692				328W success
Funtoo	09-23 18:30	trunk		47692				332W success
CentOS 5.6 x86_64	09-23 18:33	trunk		47692				378W success
CentOS 6.4 64bit	09-23 16:03	trunk		47690		1F0E		348W 1F0E
CentOS 7.0 x86_64	09-23 19:00	trunk		47692				322W success
Fedora 18 ppc64	09-23 16:00	trunk		47690		0F1E		338W 0F1E
Fedora 20 x86_64	09-23 19:00	trunk		47692				317W success
Amazon Linux 2014.3 x64	09-23 17:00	trunk		47692				321W success
FreeBSD 9.2 x86	09-23 18:02	trunk		47692				336W success
FreeBSD 10.0 x64	09-23 18:33	trunk		47692				336W success
vc10-x64	09-23 16:09	trunk		47692				212W success
Debian 7.5 i686	09-23 01:42	2.1		p242 47629				571W success
Debian 7.5 x86_64	09-19 11:11	2.1		p242 47629				486W failed(docs CommandTimeout)
Ubuntu 10.04 32-bit	09-23 18:03	2.1		p242 47629		1F0E		529W 1F0E
Ubuntu 10.04 64-bit	09-23 17:32	2.1		p242 47629		1F0E		529W 1F0E
Ubuntu 14.04 x86_64	09-23 17:52	2.1		p242 47629				480W success
Gentoo	09-23 16:00	2.1		p242 47629				498W success
Funtoo	09-23 18:52	2.1		p242 47629				494W success
CentOS 5.6 x86_64	09-23 19:01	2.1		p242 47629				514W success
CentOS 6.4 64bit	09-23 14:38	2.1		p242 47629		failed		401W failed(docs CommandTimeout) fail…
CentOS 7.0 x86_64	09-23 17:22	2.1		p242 47629		1F0E		515W 1F0E
Fedora 18 ppc64	09-23 16:26	2.1		p242 47629		0F1E		583W failed(docs) 0F1E
Fedora 20 x86_64	09-23 17:23	2.1		p242 47629		1F0E		510W 1F0E
Amazon Linux 2014.3 x64	09-23 14:38	2.1		p242 47629				483W failed(docs CommandTimeout)

Rubyアソシエーションは、プログラミング言語Rubyの普及と発展のための組織です。

Ruby関連のプロジェクトやコミュニティ、ビジネスの関係を強化し、
エンタープライズ領域におけるRubyの利用に関する諸問題の解決に
取り組むことを目的とします。

最新ニュース

▸▸ 一覧

2014年 9月16日　【東京】Rubyビジネスセミナー Ruby技術者育成の為の、社内教育、コミュニケーションの作り方」

2014年 8月 5日　2014年度助成金公募開始

2014年 7月23日　Rubyコミュニティの「新人賞」 Ruby Prize 推薦公募開始【8月8日締切】

2014年 7月23日　Ruby Association supporters(寄付制度)のお知らせ

2014年 7月15日　Ruby技術者認定試験改訂のお知らせ

最新事例紹介

▸▸ 一覧

Ruby公式ロゴ
Rubyの公式ロゴをダウンロードできます。

Ruby技術者認定試験
試験実施要項、お申込みはこちら。

オブジェクト指向スクリプト言語 Ruby
Ruby公式サイトです。

Ruby公式サイト News RSS

Ruby 2.1.3 リリース

Fri, 19 Sep 2014 05:00:00 -0700

Ruby 2.1.3 がリリースされました。これは安定版 2.1 系のパッチレベルリリースです。 今回のリリースには、full GC タイミングの変更によるメモリ使用量抑制(Bug #9607 ...

Ruby 2.0.0-p576 リリース

Fri, 19 Sep 2014 05:00:00 -0700

現在、日本では RubyKaigi2014 が開催されていますが、それに合わせて Ruby 2.0.0-p576 がリリースされました。 今回のリリースには、多数のバグ修正が含まれています。例としては、 メモリリークや

Microsoft

購入 製品 ダウンロード サポート

The Microsoft Conference 2014
開催決定 10月23-24日

事前登録はこちらから







chkbuild 設定

5 hosts


ロール　サービスメトリック

1 Role

30min 1h 6h 1d 1W 1M 1Y　Collapse All

build

Write a Comment...

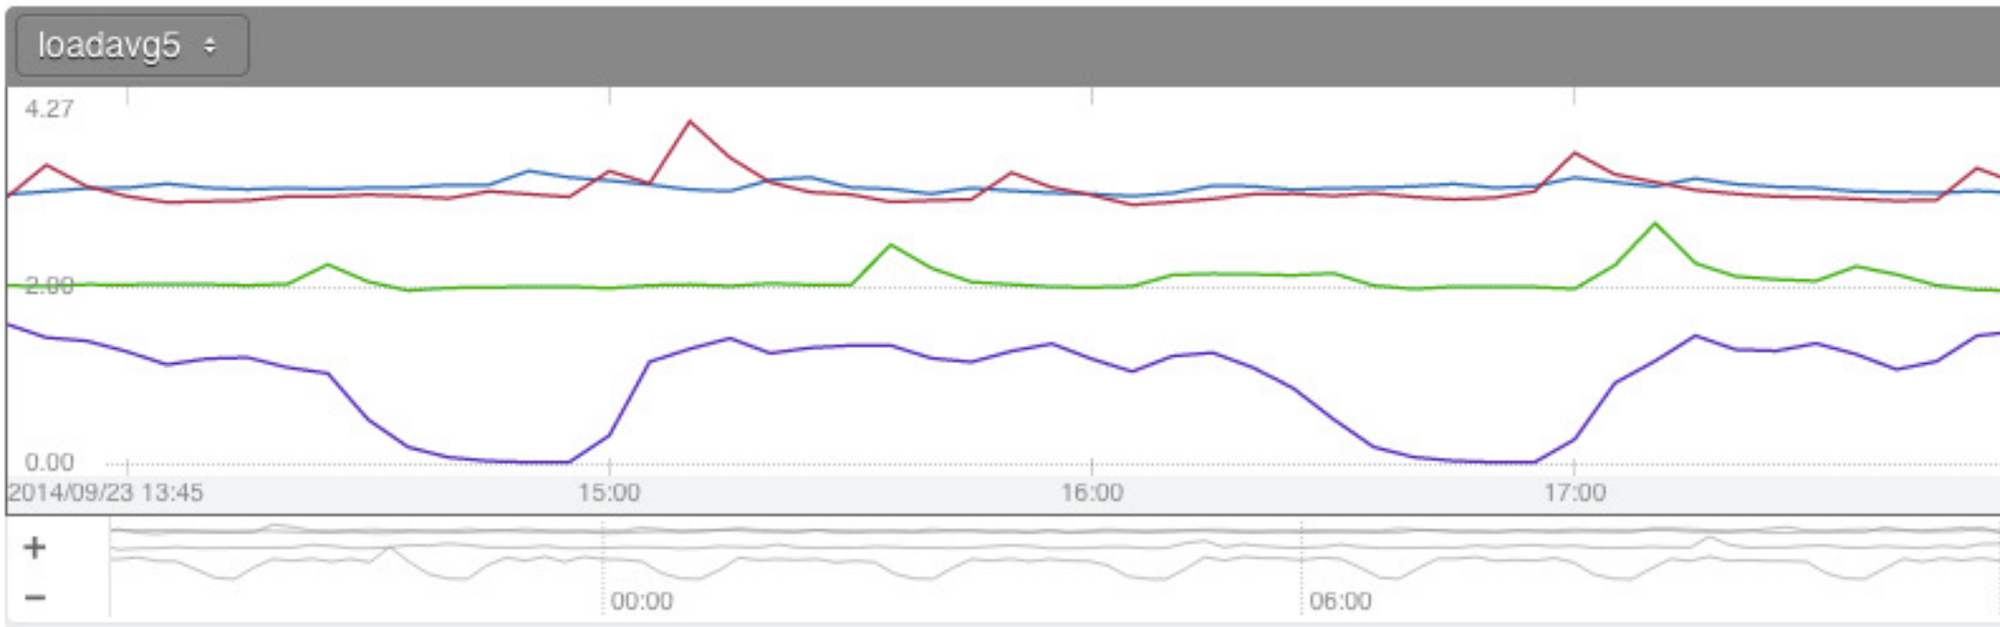


chkbuild001.hsbt.org	standby	10.37.155.243	22:00:0b:04:0a:99	3.6GB	1 x Intel(R) Xeon(R) CPU
chkbuild002	standby	128.199.250.128	04:01:18:28:fc:01	1003MB	1 x Intel(R) Xeon(R) CPU
chkbuild003	standby	128.199.242.93	04:01:18:28:fe:01	994MB	1 x Intel(R) Xeon(R) CPU
chkbuild005.hsbt.org	standby	128.199.204.146	04:01:20:8f:da:01	994MB	1 x Intel(R) Xeon(R) CPU
localhost	standby	128.199.254.220	04:01:18:ba:ad:01	994MB	1 x Intel(R) Xeon(R) CPU

A Revolutionary New Kind of Application Performance Management

Realize the potential in Cloud Computing
by managing cloud servers through “roles”

Sign Up for Mackerel

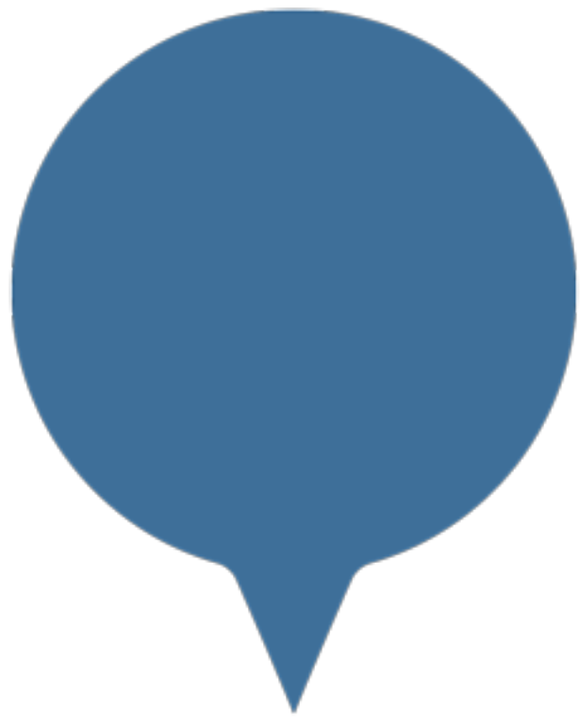

GMOペパボ株式会社

Print
Subscribe to Newsletters
ShareThis

What Is Web 2.0

Design Patterns and Business Models for the Next Generation of Software

by Tim O'Reilly
09/30/2005

Oct. 2009: Tim O'Reilly and John Battelle answer the question of "What's next for Web 2.0?" in Web Squared: Web 2.0 Five Years On.

The bursting of the dot-com bubble in the fall of 2001 marked a turning point for the web. Many people concluded that the web was overhyped, when in fact bubbles and consequent shakeouts appear to be a common feature of all technological revolutions. Shakeouts typically mark the point at which an ascendant technology is ready to take its place at center stage. The pretenders are given the bum's rush, the real success stories show their strength, and there begins to be an understanding of what separates one from the other.

The concept of "Web 2.0" began with a conference brainstorming session between O'Reilly and MediaLive International. Dale Dougherty, web pioneer and O'Reilly VP, noted that far from having "crashed", the web was more important than ever, with exciting new applications and sites popping up with surprising regularity. What's more, the companies that had survived the collapse seemed to have some things in common. Could it be that the dot-com collapse marked some kind of turning point for the web, such that a call to action such as "Web 2.0" might make sense? We agreed that it did, and so the Web 2.0 Conference was born.

In the year and a half since, the term "Web 2.0" has clearly taken hold, with more than 9.5 million citations in Google. But there's still a huge amount of disagreement about just what Web 2.0 means, with some people decrying it as a meaningless marketing buzzword, and others accepting it as the new conventional wisdom.

This article is an attempt to clarify just what we mean by Web 2.0.

In our initial brainstorming, we formulated our sense of Web 2.0 by example:

Web 1.0		Web 2.0
DoubleClick	-->	Google AdSense
Ofoto	-->	Flickr
Akamai	-->	BitTorrent
mp3.com	-->	Napster
Br[illegible]	-->	[illegible]dia
[illegible]onal [illegible]bs	-->	blo[illegible]g
e[illegible]	-->	[illegible]ing.org a[illegible]VD
domain name speculation	-->	[illegible] engine optimization

Read this article in:

- Arabic
- Chinese
- French
- German
- Italian
- Japanese
- Korean
- Spanish

Web 2.0 Courses

O'REILLY SCHOOL of TECHNOLOGY

PHP/SQL 3: Seamless Web 2.0 Integration

Success in the Web 2.0 world depends on a successful user experience.

Register now to learn advanced User Interface techniques using PHP and SQL. You'll master building a dynamic website using efficient and reusable code and seamlessly integrating Web 2.0 patterns, object-oriented PHP, along with other technologies and techniques.

Enroll Today!

Recommended for You



[illegible]rn C++
Ebook: $42.99

A long time ago...

東京のための新ドメイン

.tokyo

.tokyo 検索する

ven.tokyo birth.tokyo midnight.tokyo full.tokyo dont-c

.tokyoのメリット

ぱっと見て東京に関連するWebサイトだとわかる

SUZURI

欲しいものは、作ればいい。

Tシャツやスマホケース、自分だけのオリジナルグッズが作れる！売れる！

オリジナルグッズを作る

30 days Album™ by GMOペパボ
We host your memories

なくしたくない思い出。全部、お預かりします。

オンラインアルバム + フォトストレージサービス・30days Album™

これまでに 426,125 人のお客様の **248,154,352** 枚の写真をお預かりしています。

PROプランにアップグレード
アルバム作成数・ストレージ容量 無制限!

Available on the App Store　ANDROID APP ON Google play



写真を見せる。写真を残す。30days Album™ で出来ること。

Album オンラインアルバム

楽しい思い出をみんなで共有。

Storage フォトストレージ

大切な写真・動画をいつまでも保存。

Pepabo



Hosting



EC



Media



Over 250 people

organizations which design systems ... are constrained to produce designs which are copies of the communication structures of these organizations

— M. Conway

Pepabo



PHP
MySQL5



PHP
MySQL4



Ruby and PHP
Rails
MySQL5

ミドルウェアのアップグレード

Ruby/Rails　アクセス解析基盤の構築

カンファレンス発表　セキュリティ監査

テスト基盤の構築　コードレビュー

技術基盤チーム

github

社内開発基盤の構築　原稿執筆

開発プロセス　JSOXの運用整備

Jenkins　統計基盤の構築　RDBMS

OSS開発　サーバー構成管理の刷新

Pepabo



PHP
MySQL5



PHP
MySQL4



Ruby and PHP
Rails
MySQL5

技術基盤チーム

Pepabo



Ruby
Rails
MySQL5



Ruby
Rails
MySQL5



Ruby and PHP
Rails
MySQL5

技術基盤チーム



Why Ruby?


Why Ruby?

1. testing
2. environment
3. references

The Pragmatic Programmers

The RSpec Book

Behaviour-Driven Development with RSpec, Cucumber, and Friends

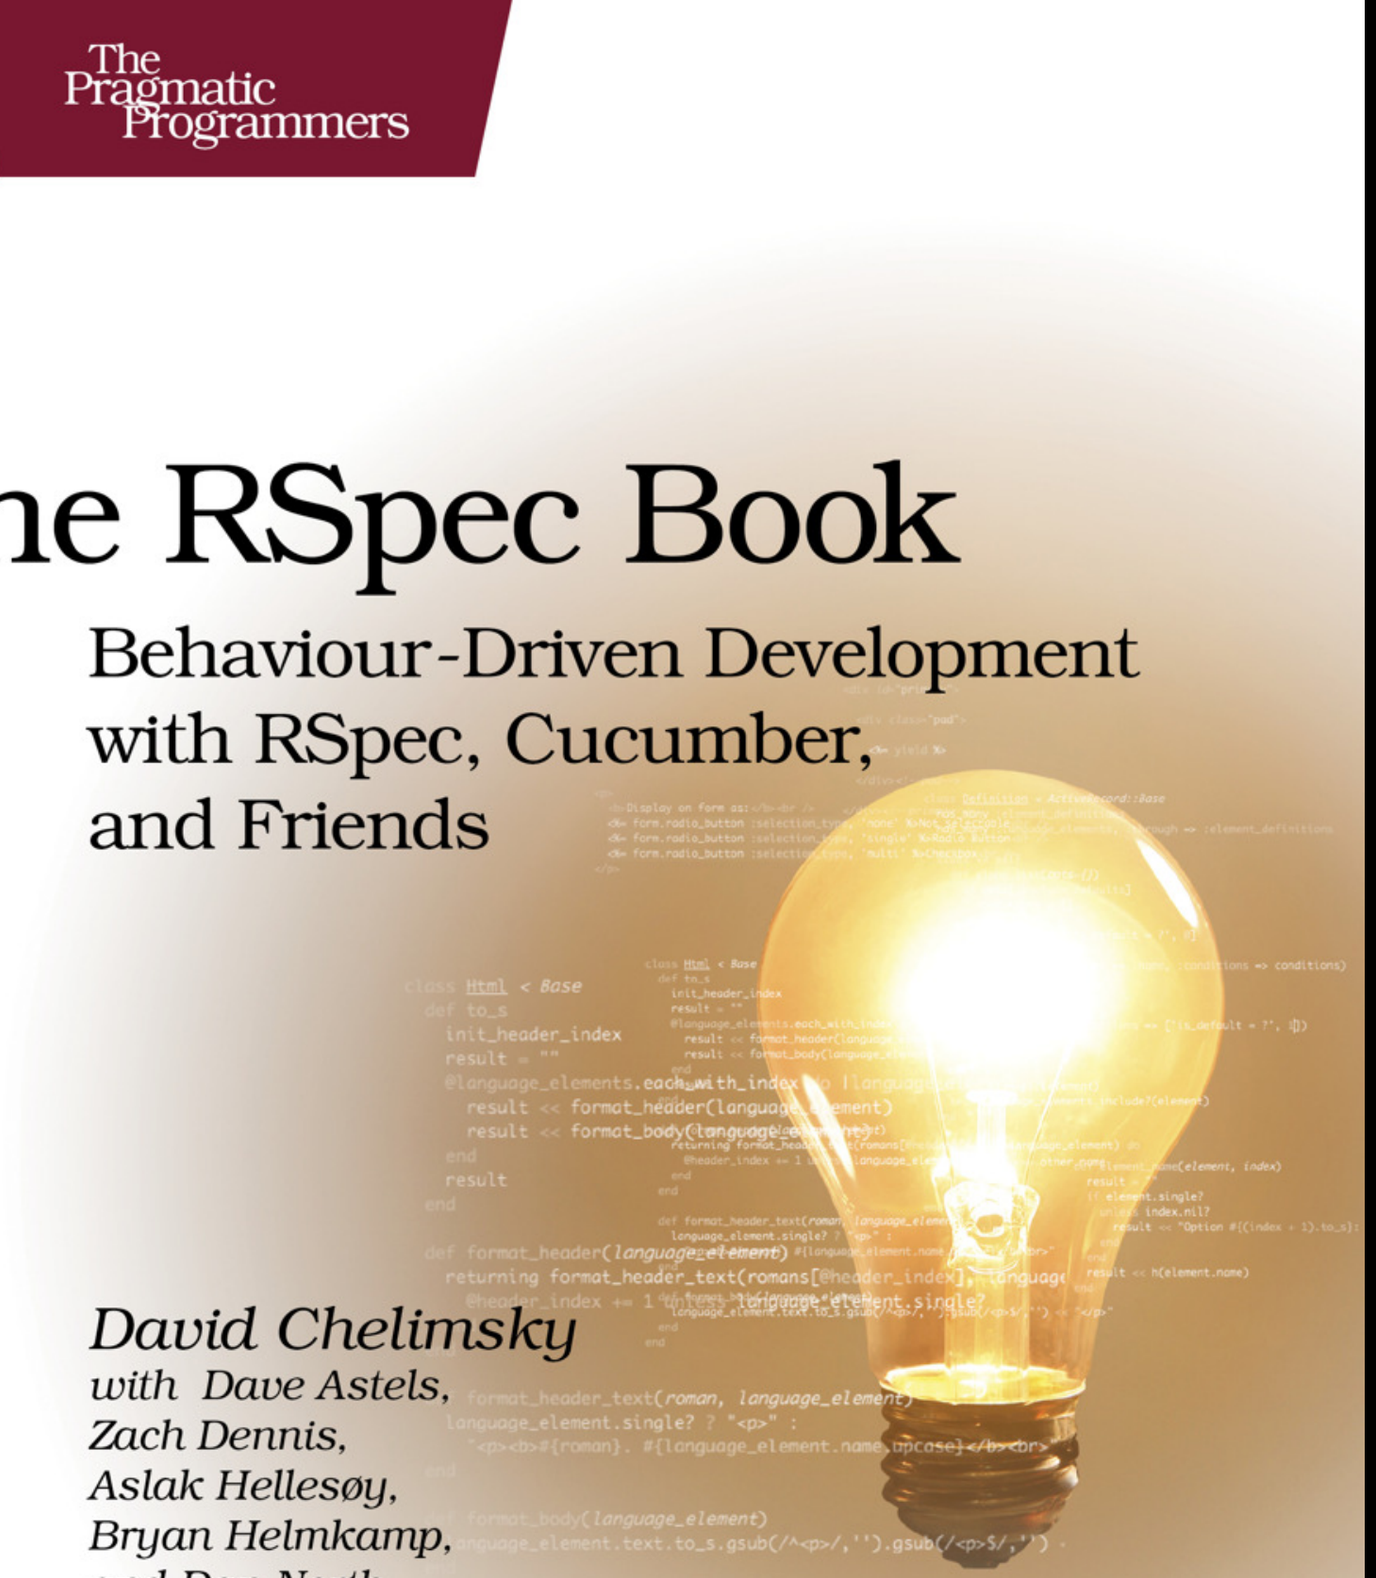

David Chelimsky
with Dave Astels, Zach Dennis, Aslak Hellesøy, Bryan Helmkamp, and Dan North

Foreword by Robert C. Martin (Uncle Bob)

Edited by Jacquelyn Carter



The Facets of Ruby Series

Testing

powerful testing framework

1. test-unit
2. minitest
3. rspec

legacy testing with capybara/mechanize

By *Sarah* | February 15, 2011

I spent a little time working on some tests for a legacy web app that we plan to re-write in Ruby. Before the big re-write, I thought it would be wise to write some integration tests to call the app via http and verify responses. I wanted to use vanilla http and not have the overhead of launching a browser and was frustrated that Capybara didn't have a driver to suit my needs.

I started down the path of writing tests from scratch using Net::HTTP, but figured that there had to be someone else who had run into this before. @kakutani told me about capybara-mechanize which seems to be exactly what I need.

Here's my first really basic experiment using RSpec to test a well-known web site:

```
require 'capybara/rspec'
require 'capybara/mechanize'
Capybara.default_driver = :mechanize

describe 'web app' do
  include Capybara

  before do
    Capybara.app_host = "http://www.google.com"
  end

  it "has a copyright" do
    visit '/'
    page.should have_content('© 2011')
```


Recent Posts

- trackerbot iphone experience
- how to get paid
- cross-platform mobile frameworks and the future
- javascript and ruby classes
- mobile panel: cross-platform frameworks
- on choosing RSpec as a test framework
- legacy testing with capybara/mechanize
- kicking off remote learning for ruby on rails
- start learning ruby on rails tomorrow night 1/25
- cross-platform smartphone development
- perfection vs mastery
- backwards stratego
- how to get a Rails job
- freedom in ruby and code
- seek to inspire
- pie: game development for kids
- kids track at RubyConf details
- the future of mobile software engineering
- on fixing bugs...
- kid track at rubyconf?

About

- send feedback
- what's an ultrasaurus?
- who am I?

Capybara

```
 1) Failure:
TestPowerAssert#test_power_assert_failed [test/test_power_assert.rb:10]:
    assert { "0".class == "3".to_i.times.map {|i| i + 1 }.class }
                  |          |   |    |                 |
                  |          |   |    |                 Array
                  |          |   |    [1, 2, 3]
                  |          |   #<Enumerator: 3:times>
                  |          3
                  String
```

Power Assert

Power Assert for Ruby

77 commits | 1 branch | 4 releases | 2 contributors

branch: master | power_assert / +

Add link to pry-power_assert

k-tsj authored 2 days ago — latest commit 2b63624422

lib	Merge pull request #2 from yui-knk/fix/space	a month ago
test	Support bmethod	2 months ago
.gitignore	Add development dependency on SimpleCov	3 months ago
.travis.yml	Use ruby 2.1.2 on travis-ci.org	4 months ago
BSDL	First commit	4 months ago
COPYING	First commit	4 months ago
Gemfile	First commit	4 months ago
README.rdoc	Add link to pry-power_assert	2 days ago
Rakefile	Emit warnings on test	3 months ago
power_assert.gemspec	Add more information to gemspec description.	12 days ago

Code
Issues 0
Pull Requests 0
Wiki
Pulse
Graphs

SSH clone URL

git@github.com:k-t

You can clone with HTTPS, SSH, or Subversion.

Clone in Desktop

Download ZIP

README.rdoc

power_assert

testcase

```ruby
class TestPowerAssert < Minitest::Test
  def test_power_assert_failed
    assert { "0".class == "3".to_i.times.map {|i| i + 1 }.class }
  end
end
```

assertion

```
  1) Failure:
TestPowerAssert#test_power_assert_failed [test/test_power_assert.rb:10]:
    assert { "0".class == "3".to_i.times.map {|i| i + 1 }.class }
                      |              |       |       |                |
                      |              |       |       |              Array
                      |              |       |       [1, 2, 3]
                      |              |       #<Enumerator: 3:times>
                      |              3
                      String
```

Typical usecase

1. run test -> fail

2. add inspection code

3. run test -> fail -> detect fail reason

4. fix code

5. run test -> success

Typical usecase

1. run test -> fail

2. add inspection code

3. run test -> fail -> detect fail reason

4. fix code

5. run test -> fail!!! -> turn to 2

Typical usecase

1. run test -> fail

```
1) Failure:
TestPowerAssert#test_power_assert_failed [test/test_power_assert.rb:10]:
assert { "0".class == "3".to_i.times.map {|i| i + 1 }.class }
                |      |  |     |              |
                |      |  |     |            Array
                |      |  |     [1, 2, 3]
                |      |  #<Enumerator: 3:times>
                |      3
                String
```

4. fix code

5. run test -> fail!!! -> turn to 4

Power Assert for Minitest — Edit

23 commits | 1 branch | 3 releases | 3 contributors

branch: master | minitest-power_assert / +

Merge pull request #2 from yui-knk/fix/doc ...

柴田 博志 (hsbt) authored on Aug 20 — latest commit 558f5bab65

lib	bump version to 0.0.3	4 months ago
test	ignored warning	a month ago
.gitignore	first commit	4 months ago
.travis.yml	enabled travis	4 months ago
BSDL	use 2-clause BSDL	4 months ago
COPYING	use 2-clause BSDL	4 months ago
Gemfile	first commit	4 months ago
README.md	fix/typo in README.md	a month ago
Rakefile	added test task	4 months ago
minitest-power_assert.gemspec	gemspec	4 months ago

Code
Issues 0
Pull Requests 0
Wiki
Pulse
Graphs
Settings

SSH clone URL

git@github.com:hsb

You can clone with HTTPS, SSH, or Subversion.

Clone in Desktop

Download ZIP

README.md

Minitest::PowerAssert

gem version 0.0.3 | build passing

Development Environment

1. osx + homebrew
2. rbenv + ruby-build



Many references

Why Rails?


O'Reilly Generator
第5版
The Good Parts
Rails Good Parts
RailsPacific
SHIBATA 著
Jerry Lee 訳

Why Rails?

1. modern architecture

2. oss way

3. admin integration

enforce
modern architecture

case.1
Ruby 1.8.6 to Ruby 2.1.2





Ruby 1.8.6

Rails 2.0.2



Ruby 2.1.3

Rails 4.1.6


		Ruby				
		1.8.6	1.8.7	1.9.3	2.0.0	2.1
Rails	2.0/2.1	O	O	X	X	X
	2.3	X	O	X	X	X
	3.0	X	O	O	X	X
	3.2	X	O	O	O	X
	4.0/4.1	X	X	O	O	O

case.2
replace legacy middleware

KyotoTycoon
to
memcached

application server

app1

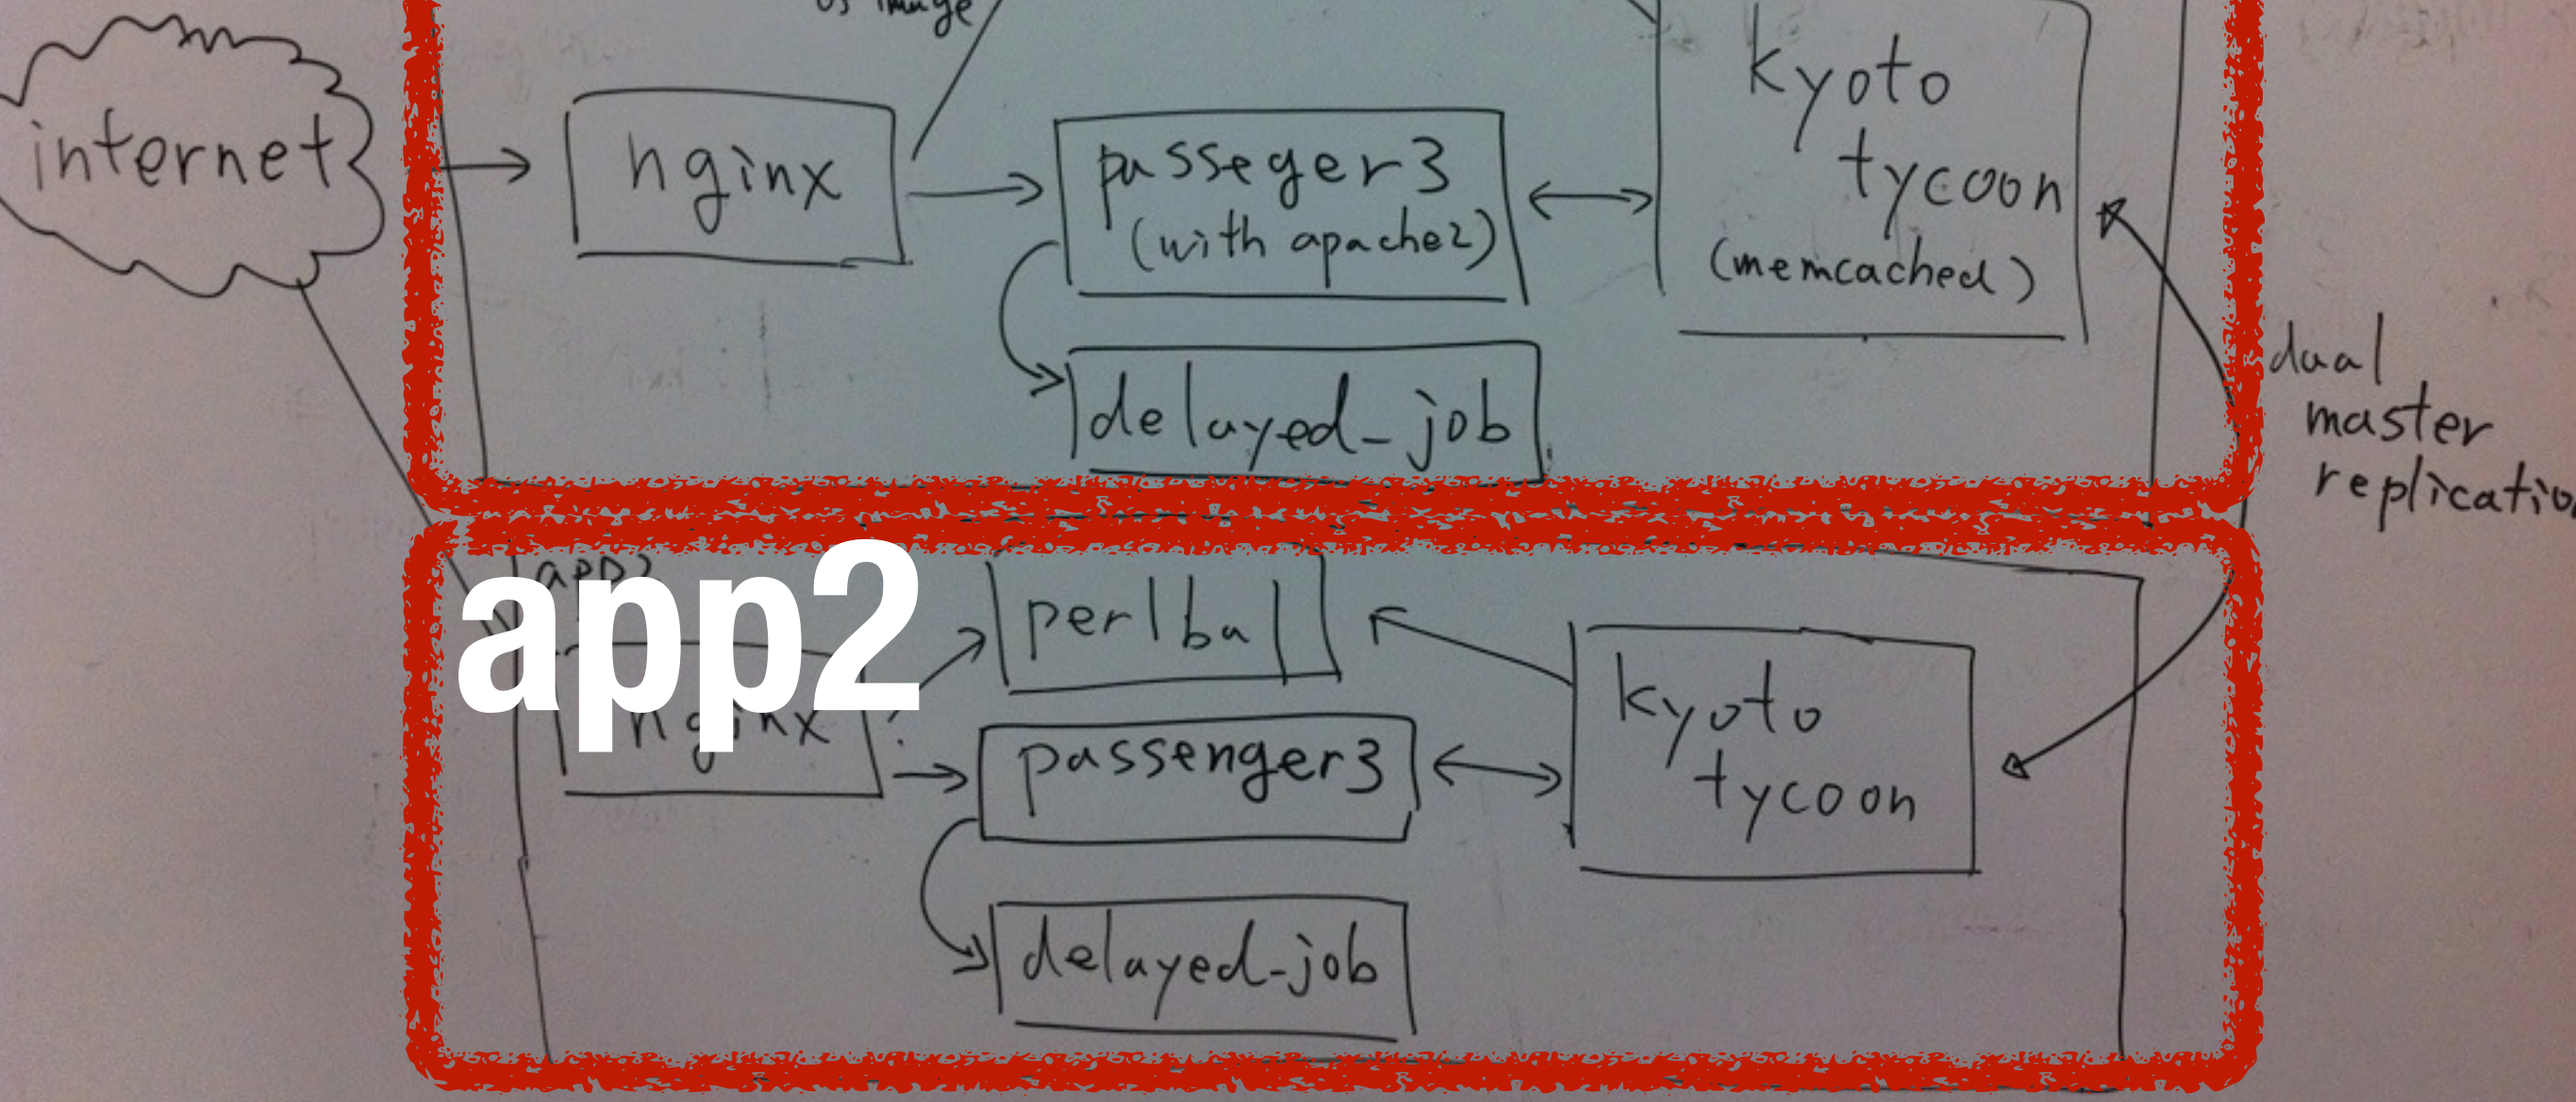

app2


rails4 need to dalli

```
begin
  require 'dalli'
rescue LoadError => e
  $stderr.puts "You don't have dalli installed in your
application. Please add it to your Gemfile and run
bundle install"
   raise e
 end
```

kyoto tycoon is slower than mysql…

dalli is not support to kyoto tycoon…

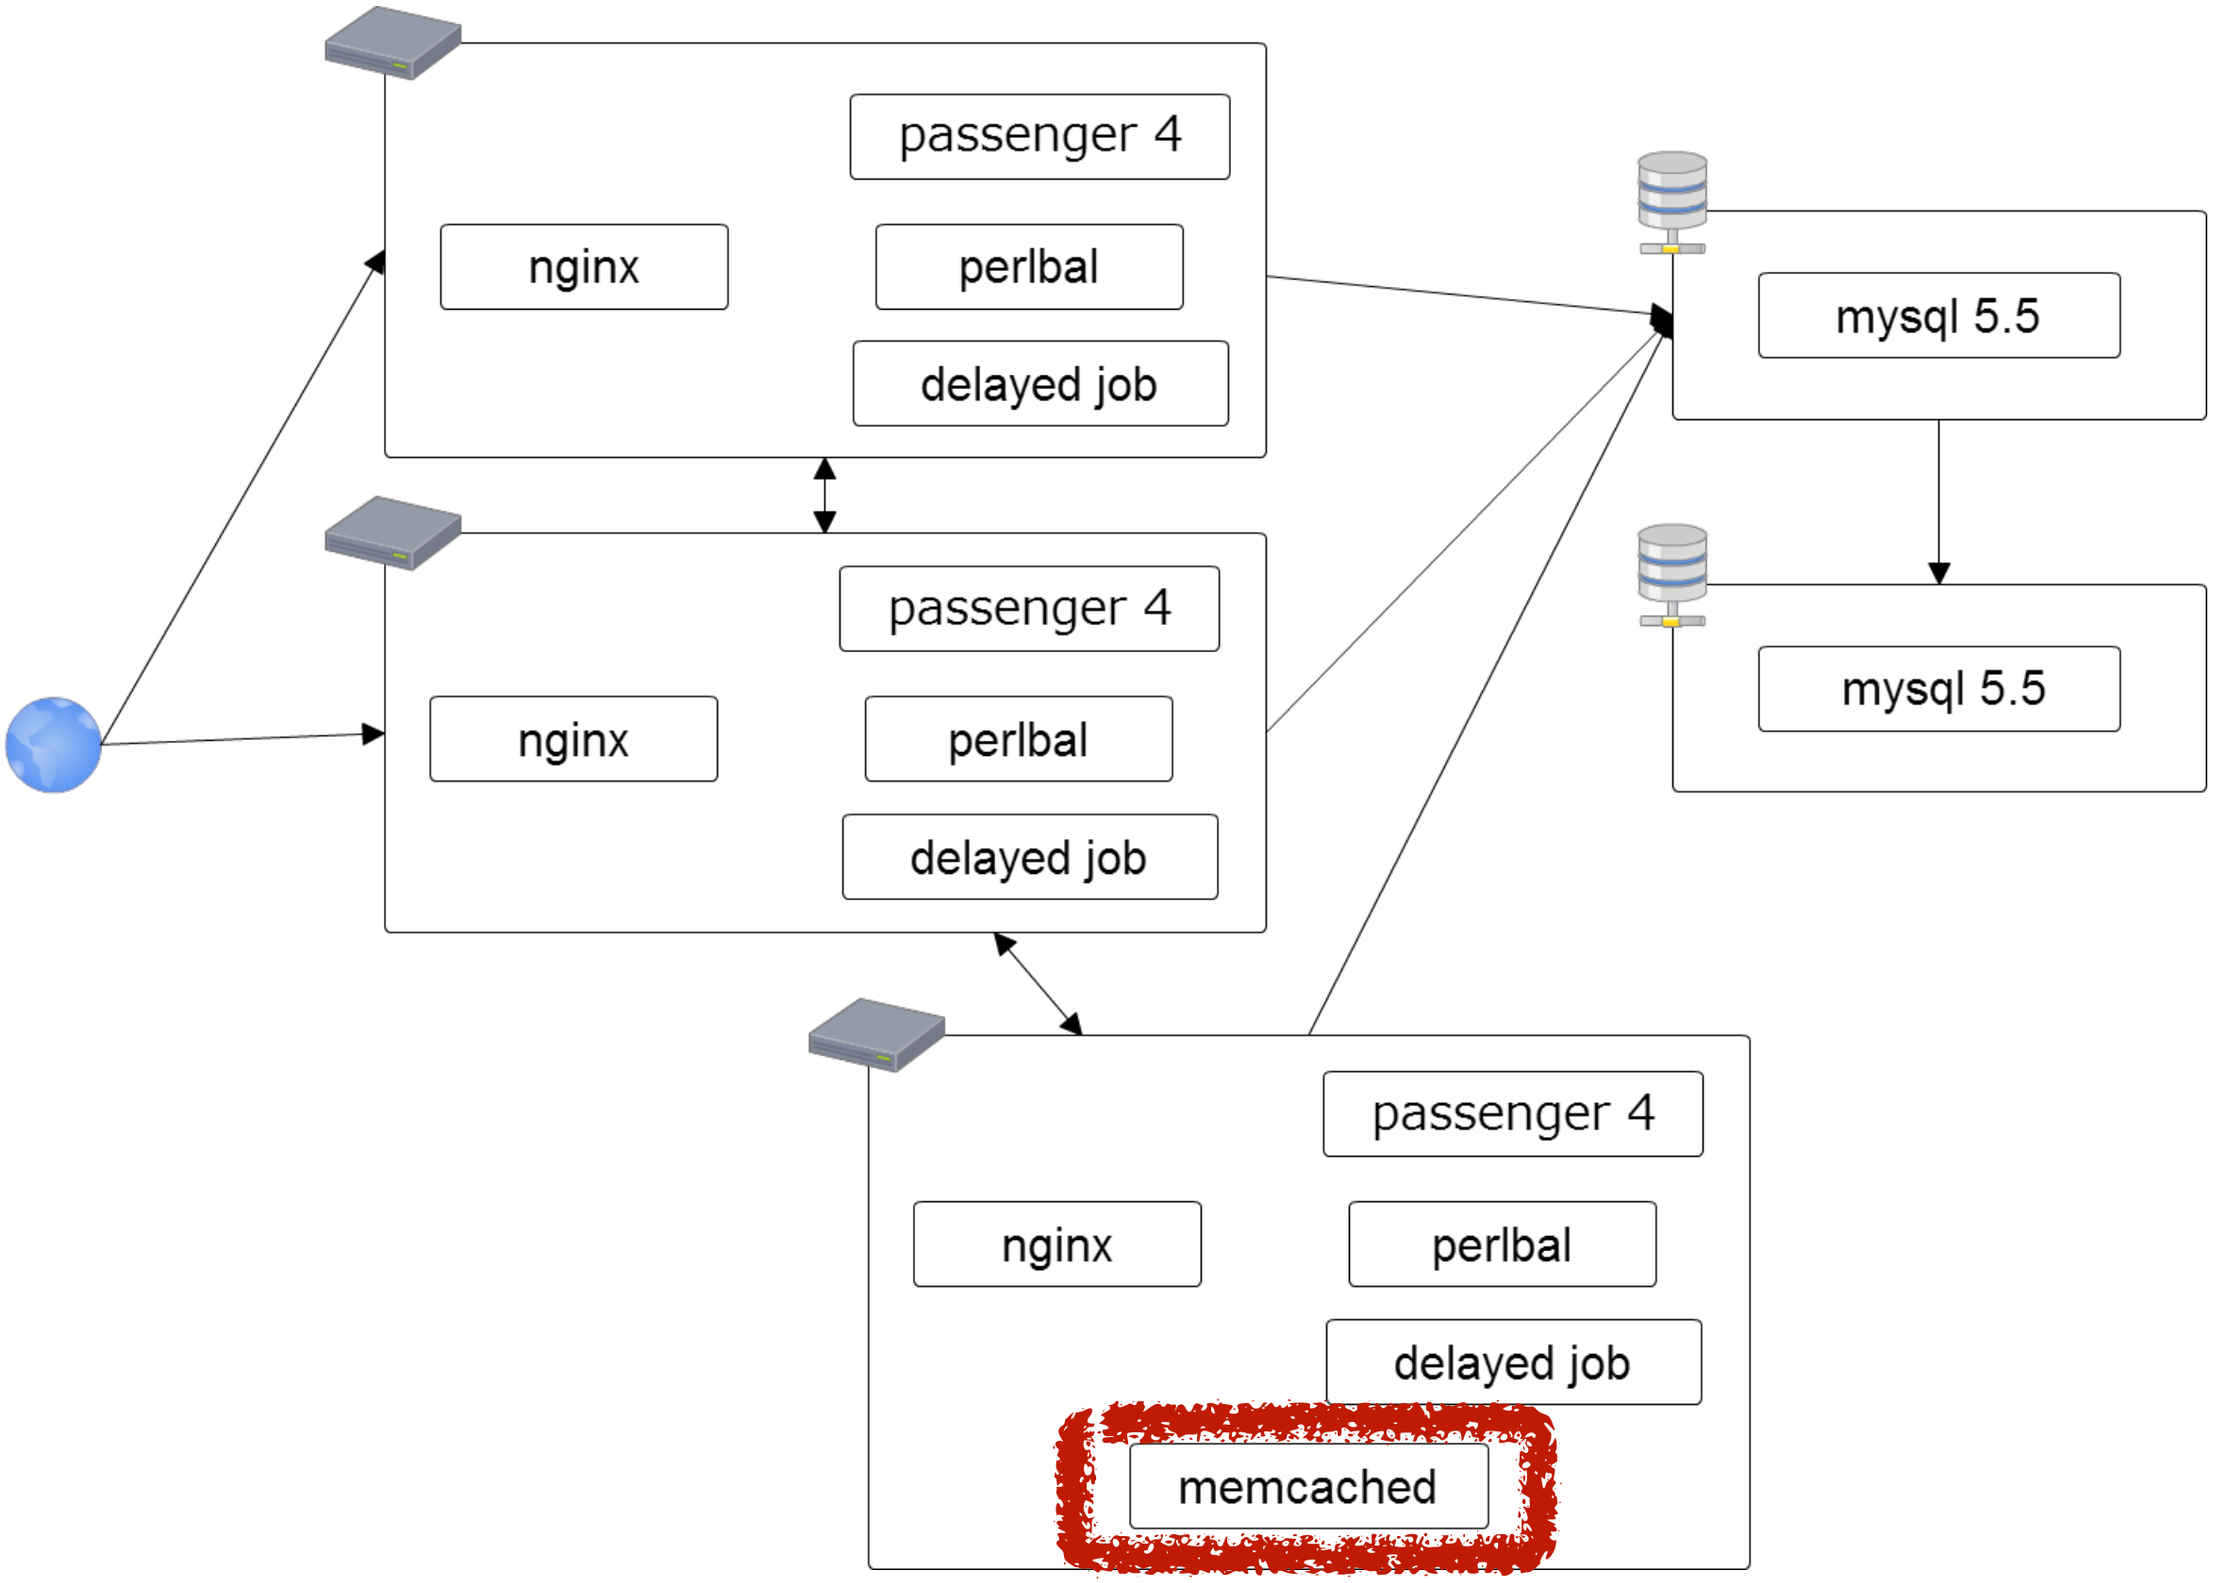


passenger 4
nginx
perlbal
delayed job
mysql 5.5
passenger 4
nginx
perlbal
delayed job
mysql 5.5
passenger 4
nginx
perlbal
delayed job
memcached

enforce oss way

Pepabo



Ruby
Rails
MySQL5



Ruby
Rails
MySQL5



Ruby and PHP
Rails
MySQL5

技術基盤チーム

Handled NameError with Minitest 5 #386

Edit New Issue

Merged **bblimke** merged 1 commit into `bblimke:master` from `hsbt:minitest5` about 21 hours ago

Conversation 2 Commits 1 Files changed 1 +12 −2

Showing **1 changed file** with **12 additions** and **2 deletions**. Show diff stats

14 lib/webmock/minitest.rb Open View

```
...  ...  @@ -1,6 +1,10 @@
 1    1    begin
 2    2      require 'minitest/test'
 3         -  test_class= MiniTest::Test
      3    +  begin
      4    +    test_class= MiniTest::Test
      5    +  rescue NameError
      6    +    test_class= Minitest::Test
      7    +  end
 4    8      assertions = "assertions"
 5    9    rescue LoadError
 6   10      require "minitest/unit"
@@ -30,4 +34,10 @@ def teardown_with_webmock
30   34      end
31   35    end
32   36
33         -WebMock::AssertionFailure.error_class = MiniTest::Assertion
      37   +begin
      38   +  error_class = MiniTest::Assertion
      39   +rescue NameError
      40   +  error_class = Minitest::Assertion
      41   +end
      42   +
```

```ruby
class Bar
  def bar(foo = foo())
    foo
  end

  def buzz(foo = foo)
    foo
  end

  def foo
    :buzz
  end
end

p Bar.new.bar
p Bar.new.buzz
```

```
% ruby -v r45272.rb
ruby 2.2.0dev (2014-04-13 trunk 45580) [x86_64-darwin13]
:buzz
nil
```

```
% ruby -v r45272.rb
ruby 2.1.2p80 (2014-03-01 revision 45231) [x86_64-darwin13.0]
:buzz
:buzz
```

```
60          count = if has_cached_counter?
61            owner.send(:read_attribute, cached_counter_attribute_name)
62          elsif options[:counter_sql] || options[:finder_sql]
63            reflection.klass.count_by_sql(custom_counter_sql)
64          else
65            scope.count
66          end
67
68          # If there's nothing in the database and @target has no new records
69          # we are certain the current target is an empty array. This is a
70          # documented side-effect of the method that may avoid an extra SELECT.
71          @target ||= [] and loaded! if count == 0
72
73          [association_scope.limit_value, count].compact.min
74        end
75
76        if has_cached_counter?(reflection = reflection())
77          owner.attribute_present?(cached_counter_attribute_name(reflection))
78        end
79
80        def cached_counter_attribute_name(reflection = reflection())
81          options[:counter_cache] || "#{reflection.name}_count"
82        end
83
84        def update_counter(difference, reflection = reflection())
85          if has_cached_counter?(reflection)
86            counter = cached_counter_attribute_name(reflection)
87            owner.class.update_counters(owner.id, counter => difference)
88            owner[counter] += difference
89            owner.changed_attributes.delete(counter) # eww
90          end
91        end
92
93        # This shit is nasty. We need to avoid the following situation:
94        #
95        #   * An associated record is deleted via record.destroy
96        #   * Hence the callbacks run, and they find a belongs_to on the record with a
97        #     :counter_cache options which points back at our owner. So they update the
98        #     counter cache.
99        #   * In which case, we must make sure to *not* update the counter cache, or else
100       #     it will be decremented twice.
101       #
```

admin integration

What's admin?

1. customer support

2. payment/refund

3. no console

organizations which design systems ... are constrained to produce designs which are copies of the communication structures of these organizations

— M. Conway

Our Typical Team

Developer

Director

Customer Support



































unmaintained…

better admin

1. app internal

2. Rails Engine

3. other app

app internal

pros
- better testing
- better deploy

cons
- including difference application
- including effective code

Rails Engine

pros
- splitting application code
- better deploy

cons
- difficulty testing
- can’t use production code directly

Other app

pros
 definitely splitting app

cons
 separated develop cycle
 duplicated code


WARNING
No silver bullet

Optimize Your Company



Rails
like a php
MySQL5



Rails
like a java
MySQL5




Rails
like a php
MySQL5

技術基盤チーム

The Pragmatic Programmers

Crafting Rails 4 Applications

Expert Practices for Everyday Rails Development

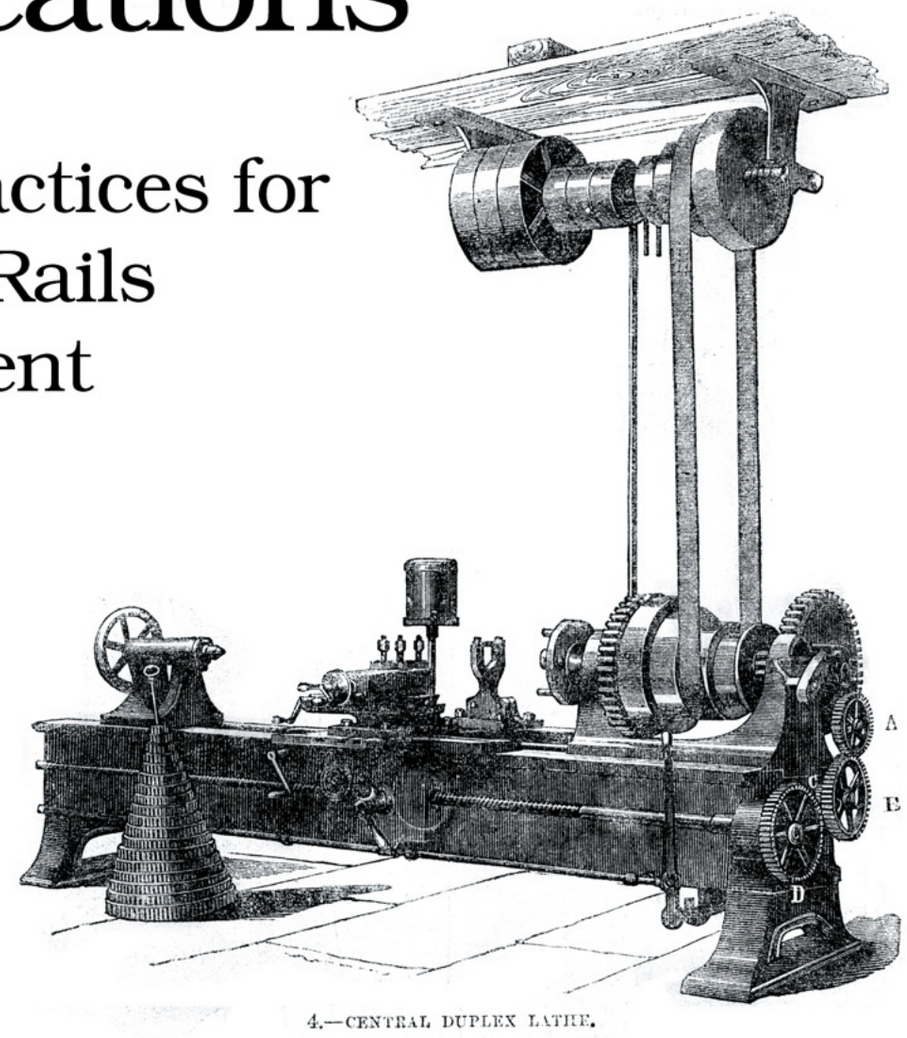

4.—CENTRAL DUPLEX LATHE.


José Valim

edited by Brian P. Hogan

The Facets of Ruby Series

Lern to Rails Internal step by step

Lern to Active Record Internal

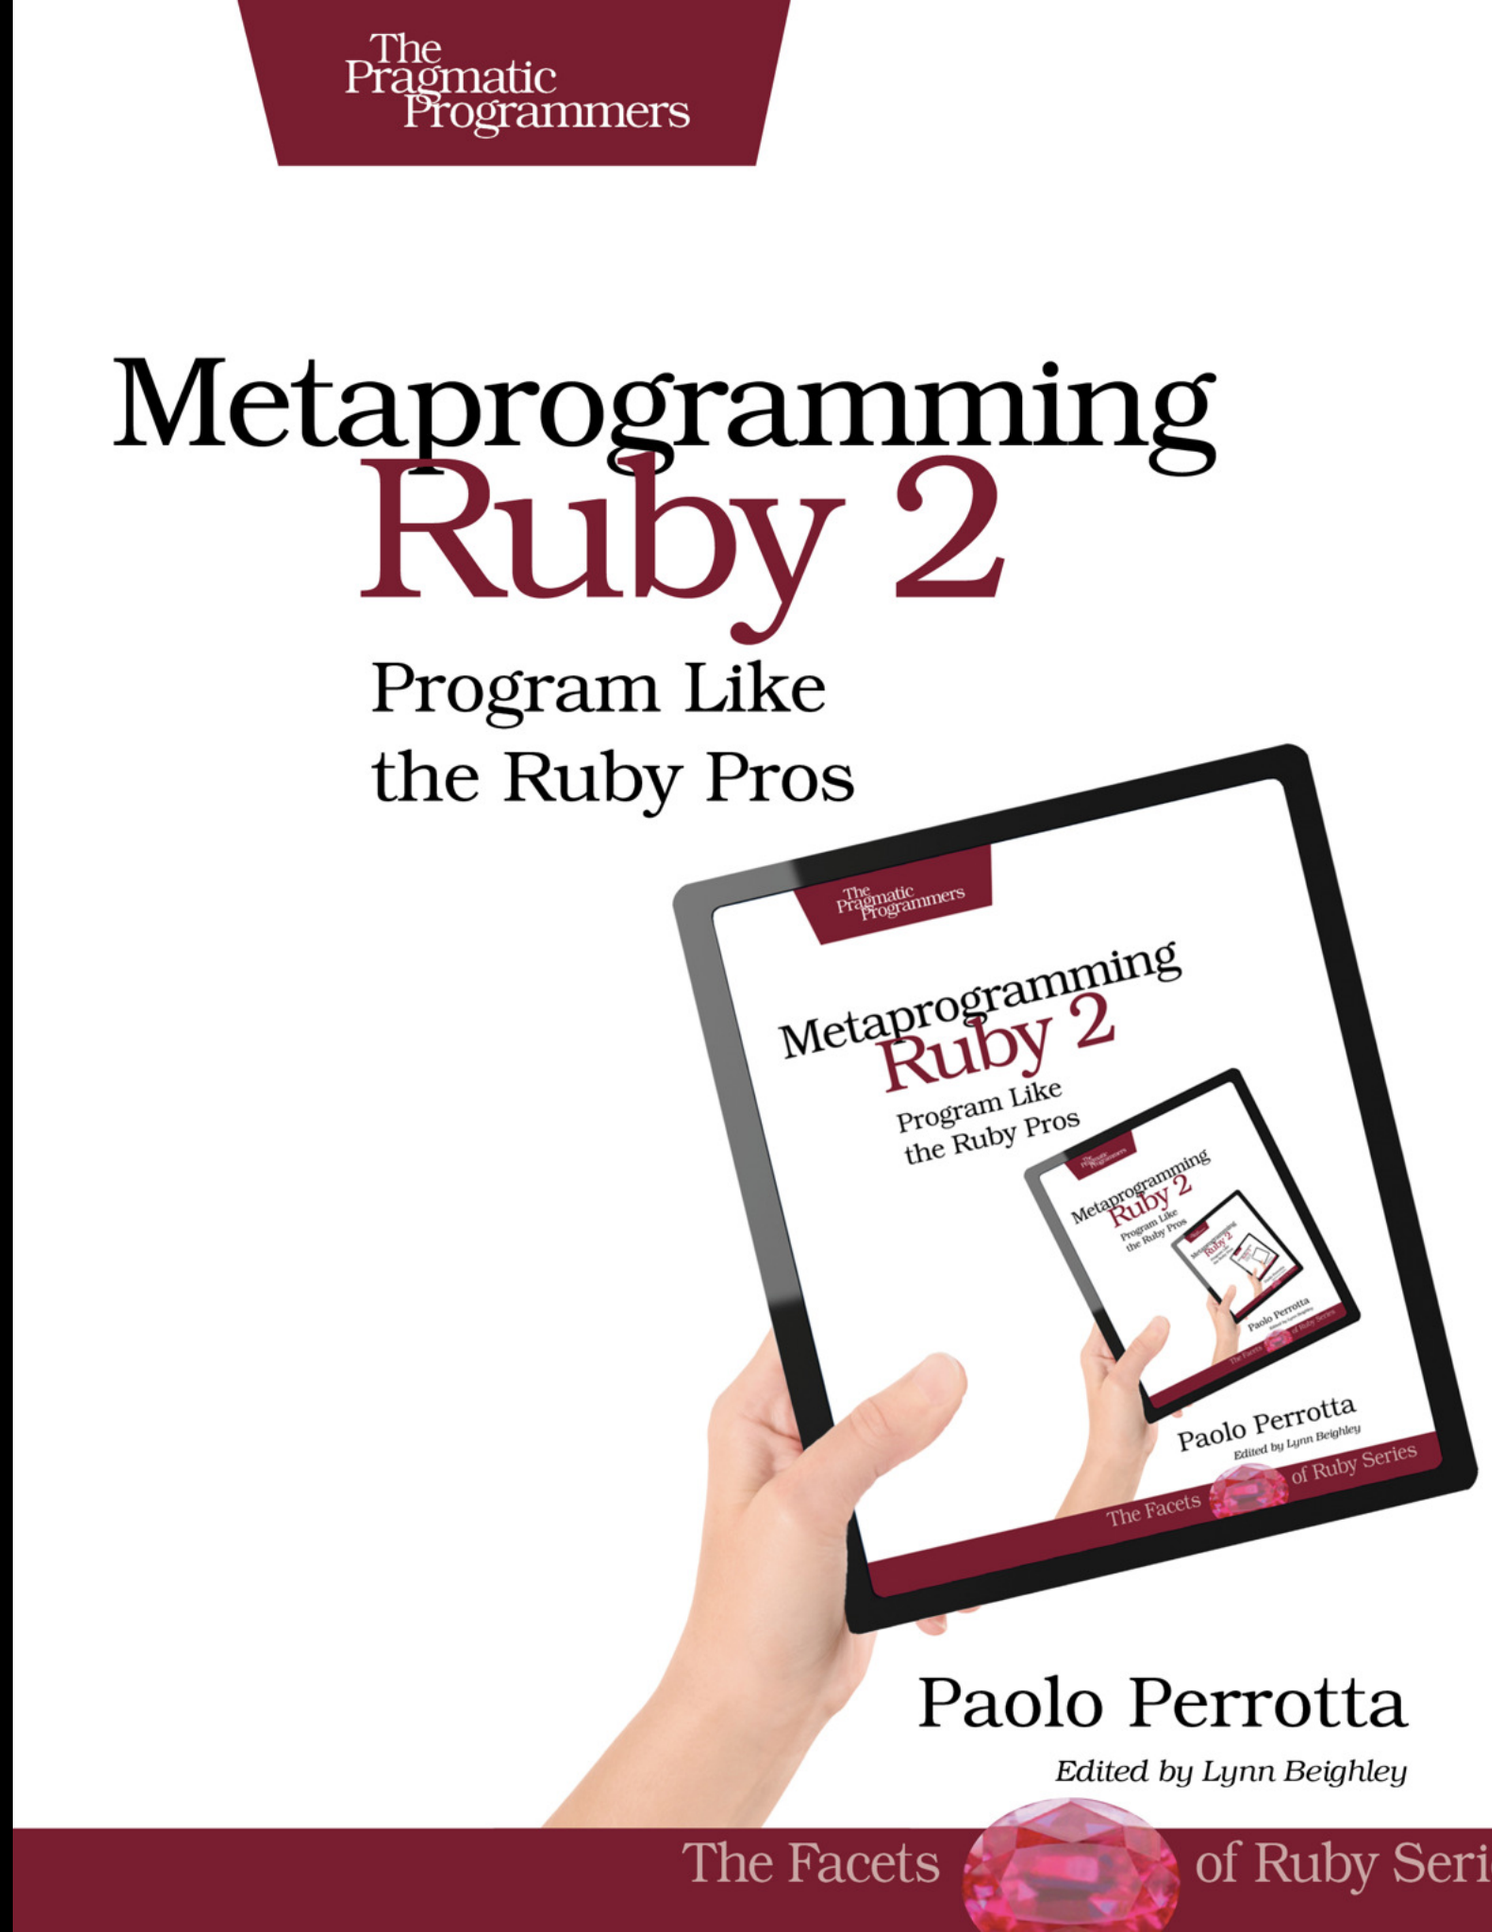

pepabo.github.io

github を用いた開発フロー テンプレート

Development (開発の進め方)

GitHub Flow の利用

- masterブランチは常にデプロイ可能な状態としなければならない
  - テストが失敗する状態の場合、直ちに修正するべきである
  - テストが失敗する状態の場合、デプロイすることは許されない

- 「新しい何か」に取り組む際は、 pull request を用いるべきである
  - ブランチは master から作成し、ブランチ名は説明的な名前とするべきである (例: new-oauth2-scopes, fix-broken-db-connection)
  - 作成したブランチにローカルでコミット後、ただちに github に push し、タイトルに [WIP] と

github workflow

ikachan [nagios_alert] RECOVERY Service: Load Average Host: job3.30d.lan Address: job3.30d.lan State: OK Date/Time: 04-11-2014 12:10:06 - Additional Info: OK

ikachan [nagios_alert] PROBLEM Service: Load Average Host: job3.30d.lan Address: job3.30d.lan State: WARNING Date/Time: 04-11-2014 12:15:06 - Additional Info: load average: 7.29, 3.57

costomer's contact

ikachan [nagios_alert] RECOVERY Service: Load Average Host: job3.30d.lan Address: job3.30d.lan State: OK Date/Time: 04-12-2014 13:30:07 - Additional Info: OK

ikachan 🍞(50)人目の FREE ユーザーが登録しました。

ikachan 🐰 <(お問い合わせがありました。不具合・障害について: https://decan.30d.jp:4443/inquiry/8505)

ikachan [nagios_alert] PROBLEM Service: Load Average Host: storage007.30d.lan Address: storage007.30d.lan State: WARNING Date/Time: 04-12-2014 13:32:07 - Additional Info: load average: 20.00, 13.25, 10.94

ikachan [nagios_alert] RECOVERY Service: Load Average Host: storage007.30d.lan Address: storage007.30d.lan State: OK Date/Time: 04-12-2014 13:35:07 - Additional Info: OK

github issue

ikachan 🍞🍞(100)人目の FREE ユーザーが登録しました。

github_30days-front [30days-front] hsbt created fix-404-missing (+4 new commits): https://github.com/paperboy-30days/30days-front/compare/325b803552ad^...e06a57d

github_30days-front 30days-front/fix-404-missing 325b803 SHIBATA Hiroshi: refactor

github_30days-front 30days-front/fix-404-missing d8c6b93 SHIBATA Hiroshi: added broken tests

github_30days-front 30days-front/fix-404-missing 4aedaed SHIBATA Hiroshi: refactor

nagios

ikachan 🍣🍣🍣(3)人目の PRO 会員申し込みがありました。

ikachan [nagios_alert] PROBLEM Service: Load Average Host: storage006.30d.lan Address: storage006.30d.lan State: WARNING Date/Time: 04-12-2014 17:17:37 - Additional Info: load average: 17.02, 12.18, 10.19

ikachan 🍞🍞🍞(150)人目の FREE ユーザーが登録しました。

hsbt パン直ってる

okkun 復活

ikachan 🍣🍣🍣🍣(4)人目の PRO 会員申し込みがありました。


ikachan 🍣🍣🍣🍣🍣(5)人目の PRO 会員申し込みがありました。


ikachan 🍣🍣🍣🍣🍣🍣(6)人目の PRO 会員申し込みがありました。

okkun 連続


ChatOps

DevOps

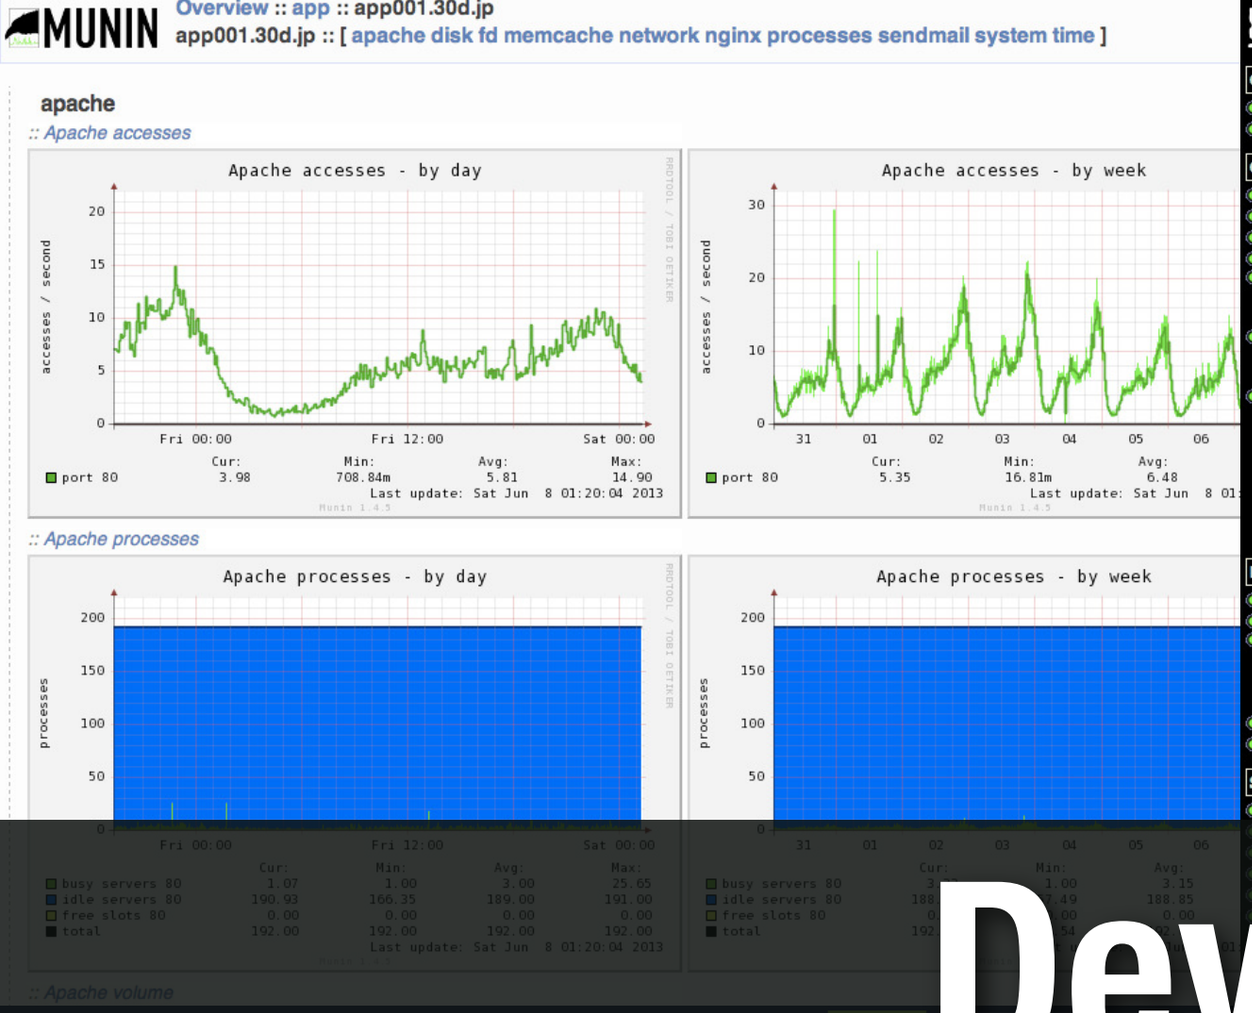

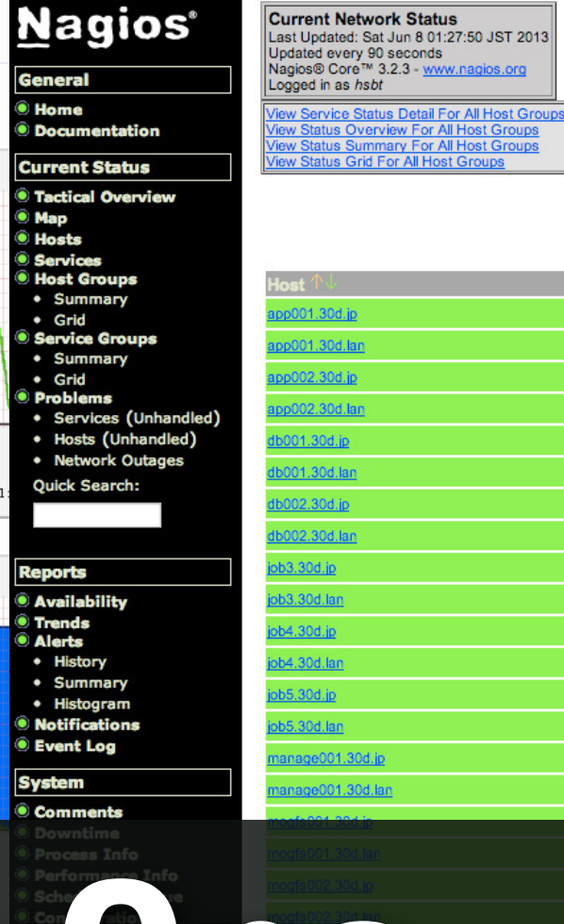



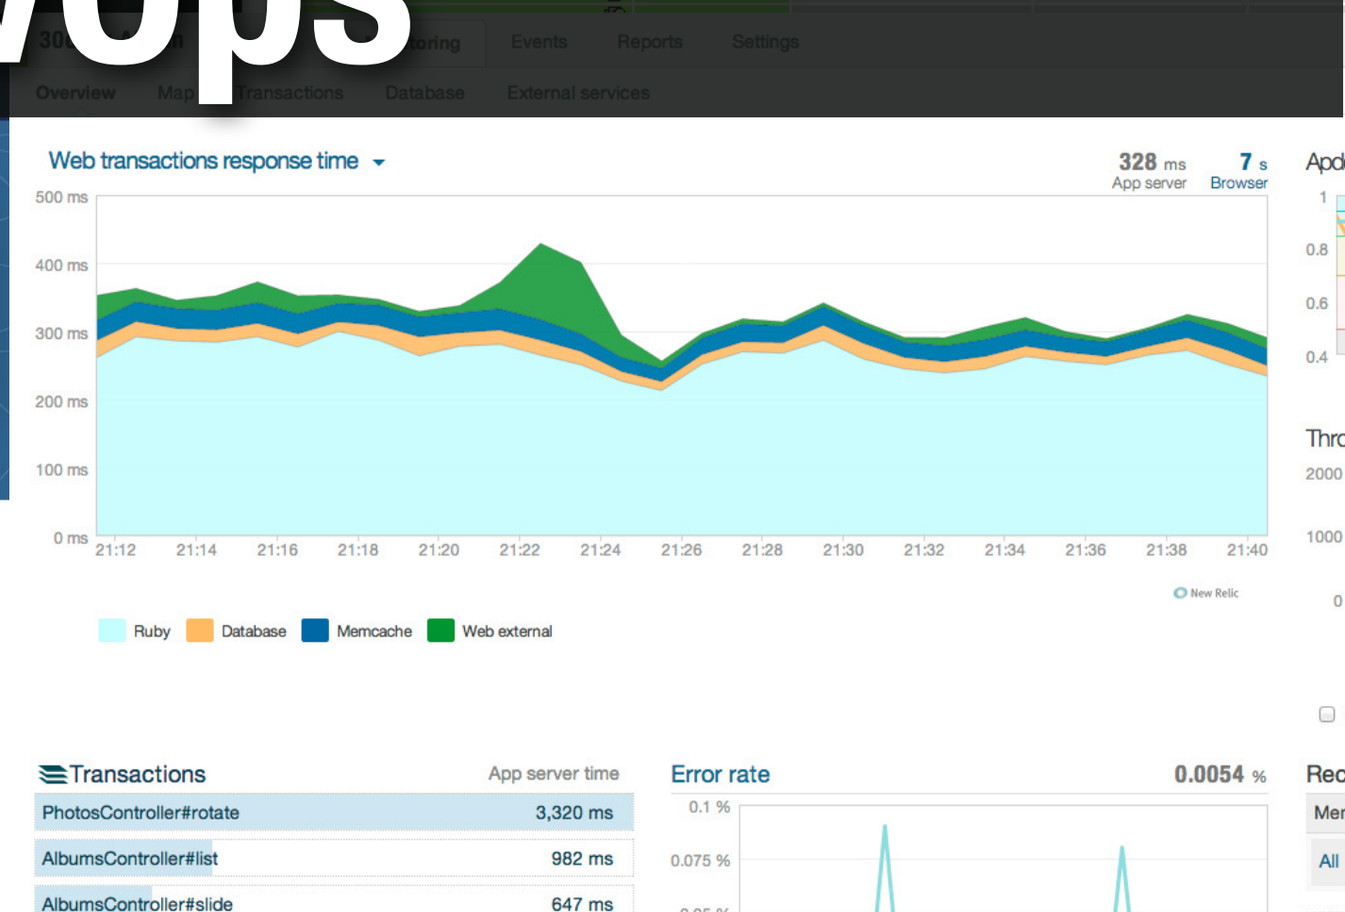

Puppet Enterprise Webinar
Watch our free live demo with Q&A

Free Learning Puppet VM
Learn Puppet in a safe, virtual environment

VMware's New Public Cloud
Learn how Puppet Enterprise automates cloud apps

Our customers manage millions of nodes with Puppet

CITRIX Clickability Constant Contact

"Puppet is fantastic at configuration


Go to the
next
10 years